


NetComm® NETCOMM GATEWAY™ SERIES
ADSL2+ Wireless N300
Modem Router with VoIP




1

Connecting Your Device

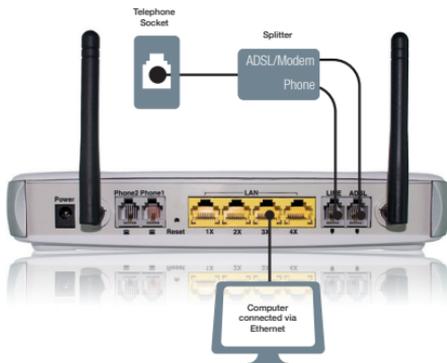


- With the supplied **Ethernet cable**, connect your PC to any of the 4 LAN ports on the back of the NB9WMAXXn
- Connect an **ADSL2+ Splitter/Filter** to your telephone **wall socket**
- With the supplied **RJ-11 telephone cable**, connect the **ADSL port** on your NB9WMAXXn to the socket labeled ADSL Modem on your Splitter/Filter

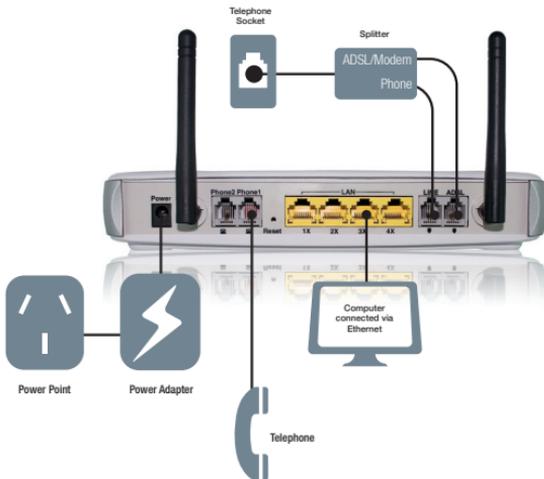

- If you wish to use your landline as a backup for VoIP please ensure:
 - The **Line port** of the NB9WMAXXn is connected to the **Phone socket** on the **ADSL2+ Splitter/Filter**
- and
- Your telephone handset is connected to one of the ports on your NB9WMAXXn labeled **Phone1** or **Phone2**
- Connect the supplied **power adapter** to the **wall power** outlet and to the **Power socket** on the NB9WMAXXn
- Switch on your **NB9WMAXXn** and wait **1 minute** for it to power up.

2 Configuring Your Device

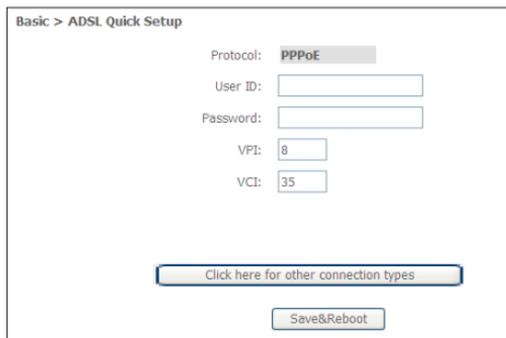


The screenshot shows a web interface titled "Basic > ADSL Quick Setup". It contains the following fields and buttons:

- Protocol: **PPPoE** (selected)
- User ID:
- Password:
- VP1:
- VC1:
- [Click here for other connection types](#)
-

- Open a web browser (e.g. Internet Explorer, Firefox, Safari) and type in **http://192.168.1.1** into the address bar and press **enter**
- When asked for a **username** and **password**, enter the default of **admin** into both fields
- Select **Quick Setup** from the left hand menu and follow the instructions to enter information about your ISP

3 Establishing Wireless Connection

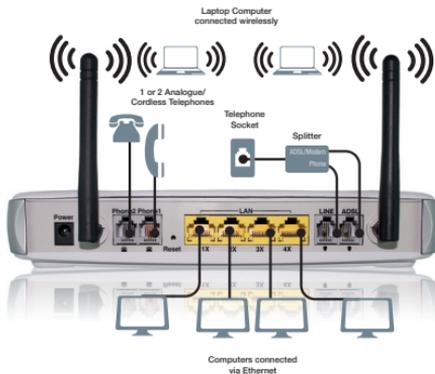

You can connect multiple wireless devices, including laptops, desktops and PDA's to your NB9WMAXXn by following the 2 basic steps

1. Using your wireless device, scan the wireless networks in your area and select the network called **NetComm wireless**. Then click **connect**
2. Enter the following default security key: **a1b2c3d4e5**

Note To ensure wireless security, we recommend you change the default settings through the User Interface. For more detail, please consult your User Guide.

4

Using VoIP



1. To configure VoIP on your NB9WMAXXn, please refer to your User Manual.

As all VoIP Service Providers (VSP's) use different settings, please consult your user manual for details about setting up VoIP.

5

Congratulations!



Now you have successfully completed the set-up process.



NetComm Velocity Series

Accessories for your product



- NP910n** Wireless N150, this product is perfect for users wishing to extend their network with the convenience of a miniature USB Adapter
- NP900n** Wireless N300, this product is perfect for home users
- NP901n** Wireless N300, perfect for data intensive applications within a SoHo environment. The included USB dock gives you the ability to move the USB Adapter so you always receive the best possible wireless signal
- NP902n** Wireless N300, perfect for SoHo, business users and gamers. The NP902n features a cable to allow you to position the adapter, a removable hook to neatly attach to the rear of your monitor and 2 detachable external antennas ensuring you receive the best possible wireless signal at all times.

* Maximum wireless signal rate and coverage values are derived from IEEE Standard 802.11g and 802.11n specifications. Actual wireless speed and coverage are dependent on network and environmental conditions included but not limited to volume of network traffic, building materials and construction/layout.