

NetComm[®]
www.netcomm.com.au

 **Dynalink**

System Log Setup

(RTA1046VW)

System Log

The system log provides a way to check for problems or provide more information about your issue when requested by Technical Support.

There are varying levels of information available to be displayed, however, this guide will only take you through the process of enabling "debug" mode. This means the maximum amount of information possible will be displayed.



As this information is cleared when the modem / router / VOIP ATA reboots, we recommend using a "**Syslog Utility**" (for example: [Kiwi Syslog](#)).

This software is able to receive the log information from the modem and save it. *

* - If supported by your model of modem / router.

System Log

This guide will take you through the steps required to enable your system log.

1. Open your web browser and go to the address <http://192.168.1.1>, using **admin** as the username and password.
2. Click on "**Management**" from the menu at the top of the page.
3. Click on "**System Log**" from the menu on the lefthandside.
4. Set "**Log**" to "**Enabled**"

Dynalink Quick Start | Status | Advanced | Wireless | Voice | Management

Language: English

System Log Configuration

This dialog allows you to configure System Log settings. All events greater than or equal to the selected level will be logged or displayed. If the selected mode is "Remote" or "Both" events will be sent to the specified UDP port of the specified log server.

Log: Disabled Enabled

Log Level: Debugging

Display Level: Error

Mode: Local

Apply Cancel View System Log

Firmware: 3.64y
ADSL2+ : A2p8025c.d20h
Wireless : 3.131.35.6

5. Set "Display Level:" is set to "Debugging" from the pull down menu.

The screenshot shows the Dynalink web interface. At the top, there is a navigation bar with the Dynalink logo and several menu items: Quick Start, Status, Advanced, Wireless, Voice, and Management. Below this is a language selector set to English. On the left side, there is a vertical navigation menu with the following items: Diagnostics, Management, Accounts, Management Control, TR-069 Client, Internet Time, System Log, Backup Config, Update Firmware, and Reset Router. The main content area is titled "System Log Configuration". It contains a descriptive paragraph: "This dialog allows you to configure System Log settings. All events greater than or equal to the selected level will be logged or displayed. If the selected mode is 'Remote' or 'Both' events will be sent to the specified UDP port of the specified log server." Below this are four settings: "Log:" with radio buttons for "Disabled" and "Enabled" (the "Enabled" option is selected); "Log Level:" with a dropdown menu set to "Debugging"; "Display Level:" with a dropdown menu set to "Debugging" (this dropdown is highlighted with a red box); and "Mode:" with a dropdown menu set to "Local". At the bottom of the configuration area, there are three buttons: "Apply", "Cancel", and "View System Log". In the bottom left corner of the page, there is a small text block: "Firmware: 3.64y", "ADSL2+: A2pB025c.d20h", and "Wireless: 3.131.35.6".


If you do not want to have your logging information sent to another computer, you can now click "Apply".

Once the page refreshes, you will then be able to click "View System Log" and see the current system log information.

To enable remote logging, please continue to the next page.

Enabling Remote System Logging

1. Set "Mode:" to either "Remote" or "Both". (both enables you to also view the system log as per the instructions above)

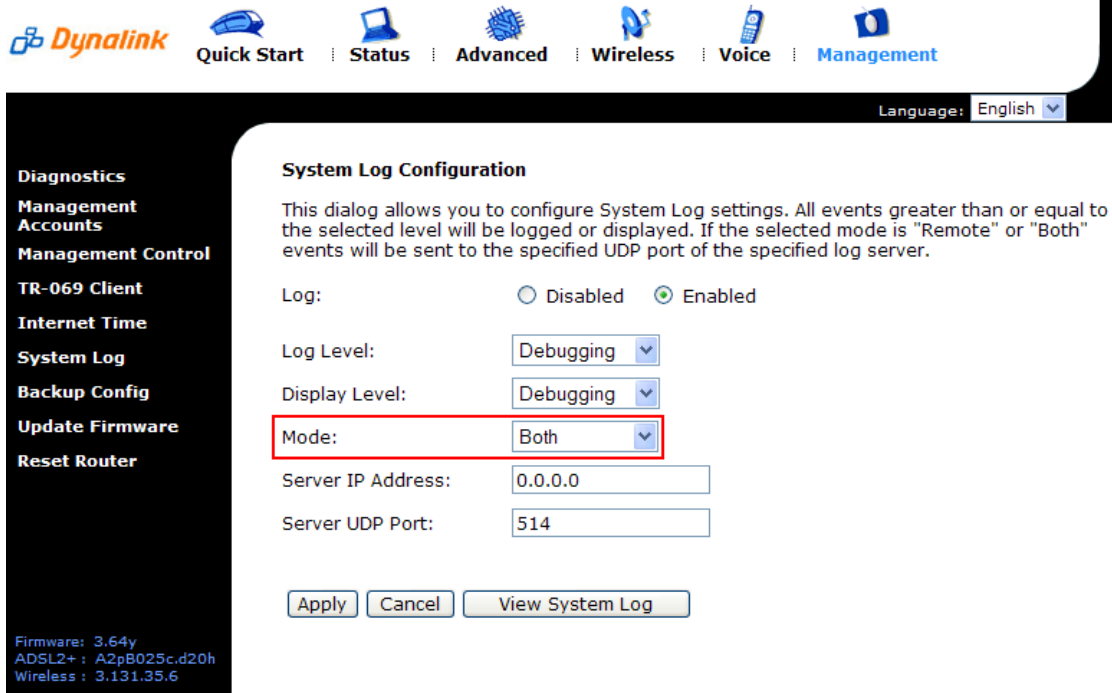

The screenshot shows the Dynalink web interface. At the top, there is a navigation bar with the Dynalink logo and several menu items: Quick Start, Status, Advanced, Wireless, Voice, and Management. Below this, there is a language selection dropdown set to English. On the left side, there is a vertical menu with the following items: Diagnostics, Management Accounts, Management Control, TR-069 Client, Internet Time, System Log, Backup Config, Update Firmware, and Reset Router. The main content area is titled "System Log Configuration". It contains a description: "This dialog allows you to configure System Log settings. All events greater than or equal to the selected level will be logged or displayed. If the selected mode is 'Remote' or 'Both' events will be sent to the specified UDP port of the specified log server." Below the description are several configuration options: "Log:" with radio buttons for "Disabled" and "Enabled" (selected); "Log Level:" with a dropdown menu set to "Debugging"; "Display Level:" with a dropdown menu set to "Debugging"; "Mode:" with a dropdown menu set to "Both" (highlighted with a red box); "Server IP Address:" with a text input field containing "0.0.0.0"; and "Server UDP Port:" with a text input field containing "514". At the bottom of the configuration area, there are three buttons: "Apply", "Cancel", and "View System Log". In the bottom left corner of the interface, there is a small text block: "Firmware: 3.64y", "ADSL2+: A2pB025c.d20h", and "Wireless: 3.131.35.6".

2. Enter the IP address of the computer you are running your Syslog Utility software on. You cannot leave this field set to the default of 0.0.0.0.

Dynalink Quick Start | Status | Advanced | Wireless | Voice | Management

Language: English

Diagnostics
Management
Accounts
Management Control
TR-069 Client
Internet Time
System Log
Backup Config
Update Firmware
Reset Router

System Log Configuration

This dialog allows you to configure System Log settings. All events greater than or equal to the selected level will be logged or displayed. If the selected mode is "Remote" or "Both" events will be sent to the specified UDP port of the specified log server.

Log: Disabled Enabled

Log Level:

Display Level:

Mode:

Server IP Address:

Server UDP Port:

Firmware: 3.64y
ADSL2+ : A2pB025c.d20h
Wireless : 3.131.35.6

3. Click **Apply**.

Your Syslog Utility software should now be able receive logging information from your modem / router / VOIP ATA.

For assistance with configuring the Syslog Utility software, please contact the software manufacturers.