

MyNetGateway NB9/NB9W

ADSL2+ Wireless Broadband Modem Router with VolP Gateway



- O Integrated VoIP, Router and 11g Wireless Access Point (access point not available of NB9)
- O Choose to call out on either your VoIP or Landline Telephone service
- O QoS (Quality of Service) Layer 3 Router to maintain VoIP call quality
- ② 2 FXS Ports, 1 FXO Port (Lifeline) and 4-Port LAN Switch
- Simple Web based setup and configuration
- PSTN Lifeline support[^]
- Day-Time parental Control
- Supports advanced Call services − Caller ID, Call On-Hold, Call Forward, Call Waiting and Transfer[†]
- Afterburner[™] and Xpress[™] Wireless Booster functionality* (not available on NB9)

NetComm's Powerful All-in-one Device

NetComm's NB9W is a powerful ADSL2+ Modem/Router, 11g Wireless AP and VoIP Integrated Access Device (IAD), providing predictable, real-time, toll-quality voice calls over the Internet. It is designed for residential and business users who need to integrate ADSL2/2+ broadband services, wired and wireless networking and VoIP technologies in one device. Add to this an FXO (line) port to connect a regular telephone service for lifeline backup.

New VolP Features

The NB9W's VoIP feature allows calls to be routed anywhere in the world, significantly reducing or eliminating long distance call charges. You can even make phone calls when your PC is turned off. The NB9W also provides exceptional voice calls during periods of heavy Internet use, by employing policy-based on Layer 3 Quality of Service (QoS), which prioritises your voice packets ensuring VoIP call quality. With NetComm's NB9W, you have all of your Internet, networking and communication needs integrated into one stylish desktop unit eliminating the "clutter" of many separate devices.




MyNetGateway NB9/NB9W

ADSL2+ Wireless Broadband Modem with VolP Gateway

Key Features

- > Full featured ADSL2+ Broadband Modem
- Integrated VolP Router and 11g Wireless Access Point
- () Choose to call out on either your VoIP or Landline Telephone service
- QoS (Quality of Service) Layer 3 Routerto maintain VoIP call quality
- 2 FXS Ports, 1 FXO Port (Lifeline) and 4-Port LAN Switch
- PSTN Lifeline support^
- Day-Time parental Control
- Supports advanced Call services Caller ID, Call On-Hold, Call Forward, Call Waiting and Transfer - service provider dependent+
- Simple Web based setup and configuration
- Afterburner™ and Xpress™ Wireless Booster functionality*

^NetComm will not accept responsibility for failed Lifeline support. †Note: The availability of some listed call features are dependent on the services supported by your VoIP service provider. Please consult them for further information *Wireless adaptor dependent. (Not available on NB9)

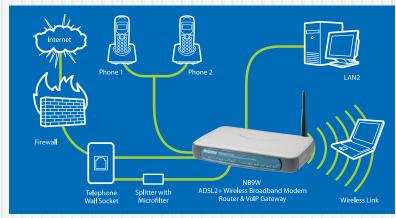



TECHNICAL SPECIFICATIONS

NB9W PORTS • 1 x ADSL Line port RJ-11 • 1 x Telephone Line port RJ-11 • 2 x Telephone Handset ports RJ-11 • 4 x LAN port RJ-45 IEEE 802.3 10/100 Base-T, Auto-crossing

WAN / LAN INTERFACE • G.992.5 (ADSL2+) • G.992.3 (ADSL2) • G.992.1 • G.992.2 • ANSI T.413 Issue 2 • ATM QoS (UBR, CBR, VBR) • Multiple PVCs (up to 8 supported) • F4/F5 OAM Loop-backs / Send & Receive • AAL ATM Attributes - AAL5 • ATM UNI support: UNI3.1/4.0

ENCAPSULATION SUPPORT • PPPoE (RFC2516) • RFC 2684 (RFC 1483) Bridge • RFC 2684 (RFC 1483) Route • PPPoA (RFC2364) • Classical IP over ATM (RFC1577)

NETWORK SUPPORT • Port forwarding rules for popular games / applications • Static IP, dynamic RIP v1 / v2 routing support • ARP • IP/TCP/UDP/ICMP/ARP protocol support Network Address Translation (NAT)
 Port Address Translation (PAT) • Port Triggering • DMZ host

- Transparent bridging & learning (IEEE 802.1d) IGMP Proxy
- IGMP Snooping DHCP Server / Client / Relay DNS
- Authentication protocols: CHAP / PAP VPN (IPSec / PPTP / L2TP) pass-through . QoS: Layer 3 policy-based / IPQoS / ToS (Type of Service)

APPROVALS • A-Tick N367

VoIP • 2 x FXS, 1 X FXO • SIP (RFC3261) • MGCP (RFC3435) • Codec: G.711, G.723.1, G.729ab • RTP (RFC1889) • SDP (RFC2327) • On/Off Hook Caller ID (ETSI based) • Lifeline • Echo cancellation (G.168) • Silence suppression

SECURITY • Stateful Packet Inspection (SPI) • Packet filtering • Denial of Service (DoS) protection • Traffic conditioning . WEQ-based bandwidth management (Congestion management) • HTTP proxy • Parental control · Access Control · IP filtering · MAC filtering

WIRELESS • IEEE 802.11g, backward compatible with 802.11b • Encryption: 64, 128-bit Wired Equivalent Privacy (WEP), Wi-fi Protected Access (WPA) • 802.1x RADIUS Authentication . Channels: 13 Channels (Australia)

- Data Rate: Up to 54Mbps 10, 25, 50, 100mW @ 22MHz channel bandwidth output power level adjustments
- MAC Address Filtering
 XPress[™] Technology
- Afterburner[™] Technology* 54g[™] Mode Wi-Fi Multimedia (WMM) • Wireless Bridge (WDS) • AP Isolation

LED • Power, ADSL, Line, Phone1, Phone2, LAN 4, LAN 3, LAN2, LAN1, WLAN, WLAN Acc

DIMENSIONS • 227 mm (W) x 40 mm (H) x 144 mm (D) (NR9W)

MANAGEMENT SUPPORT . Web-based GUI (LAN or remote) • 'root', 'support', 'user' access rights • SNMP agent • SNTP client • ILMI 4.0 • Configuration backup and restoration • Syslog (remote / local) • Software upgrade via TFTP, FTP . Local firmware upgrade via HTTP (Web GUI) Telnet • SSH • Diagnostics report with troubleshooting help

ENVIRONMENTAL CONDITIONS • Operating temperature 0 ~ 50°Celsius • Relative humidity 5 ~ 90% (non-condensing)

POWER SUPPLY • External power adapter 240 VAC (input) ~ 15VDC/1.6A (output)

* Wireless adaptor dependent

PACKAGE CONTENTS

- NB9W ADSL2+ Modem Router 15VDC 1.6 Amps power supply • RJ-11 ADSL Line connection cable • RJ-45 10/100 Ethernet cable • Driver/Manual & Utility Software CD
- Package Contents List
 Quick Start Guide

THREE YEAR WARRANTY*

One year warranty out of the box. Extra two years free with online registration at www.netcomm.com.au *Conditional upon online registration

Your NetComm dealer:



NETCOMM LIMITED ABN 85 002 490 486 PO Box 1200, Lane Cove NSW 2066 Australia P: 02 9424 2070 F: 02 9424 2010 E: sales@netcomm.com.au W: www.netcomm.com.au

Trademarks and registered trademarks are the property of NetComm Limited or their respective owners. Specifications are subject to change without notice. Images shown may vary slightly from the actual product