



How do I Find the Wireless Security Key?

(N3G002W)

About this Guide

This guide will take you through the process of changing or checking the wireless security settings on an existing wireless network.

This guide **will not** assist you to setup a new wireless network. Please refer to the wireless setup document for your model available from the support section of the [NetComm](#) website.



Any changes to your wireless security settings will require you to reconfigure wirelessly connected devices to use the new security settings. Please ensure that you have your wireless setup guide handy for this.

Finding the Wireless Security Key

To find the wireless security key of the N3G002W complete the following steps:

1. Ensure an ethernet cable is plugged from the LAN port of the N3G002W router to the ethernet port of your computer.
2. Navigate to <http://192.168.123.254> in a web browser.

The screenshot shows the web interface of the NetComm N3G002W router. At the top, there is a navigation bar with "USER's MAIN MENU" and "Status". Below this is a login section with a "System Password" field containing six dots, a "(default: admin)" label, and a "Login" button. The main content area is divided into three sections:

- System Status**: A table with columns "Item", "WAN Status", and "Sidenote".

Item	WAN Status	Sidenote
Remaining Lease Time	00:04:41	
IP Address	192.168.122.108	
Subnet Mask	255.255.255.0	
Gateway	192.168.122.210	
Domain Name Server	192.168.122.3, 192.168.122.210	
- Wireless Status**: A table with columns "Item", "WLAN Status", and "Sidenote".

Item	WLAN Status	Sidenote
Wireless mode	Enable	(AP only mode)
SSID	default	
Channel	11	
Security	None	
MAC Address	00-50-18-11-22-33	
- 3G/3.5G Modem Information**: A table with columns "Item", "Status", and "Sidenote".

Item	Status	Sidenote
Card Info	No Card Detected	
Link Status	Disconnected	
Signal Strength	N/A	0~9:Bad 10~19:Good 20~31:Excellent

3. Enter "admin" as the system password and click the **Login** button.

4. Select the **Advanced Setup** option from the menu at the top of the screen.

ADMINISTRATOR's MAIN MENU Status Logout

Wizard **Advanced Setup**

System Status [HELP]

Item	WAN Status	Sidenote
Remaining Lease Time	00:04:41	
IP Address	192.168.122.108	
Subnet Mask	255.255.255.0	
Gateway	192.168.122.210	
Domain Name Server	192.168.122.3, 192.168.122.210	

3G/3.5G Modem Information

Item	Status	Sidenote
Card Info	No Card Detected	
Link Status	Disconnected	
Signal Strength	N/A	0~9:Bad 10~19:Good 20~31:Excellent

Wireless Status

Item	WLAN Status	Sidenote
Wireless mode	Enable	(AP only mode)
SSID	default	
Channel	11	
Security	None	
MAC Address	00-50-18-11-22-33	

- Select the **Basic Setting** option from the menu at the top of the page.

ADMINISTRATOR's MAIN MENU ▶ Status ▶ Wizard ▶ Logout

BASIC SETTING
 FORWARDING RULES
 SECURITY SETTING
 ADVANCED SETTING
 TOOLBOX

System Status [HELP]

Item	WAN Status	Sidenote
Remaining Lease Time	00:04:41	
IP Address	192.168.122.108	
Subnet Mask	255.255.255.0	
Gateway	192.168.122.210	
Domain Name Server	192.168.122.3, 192.168.122.210	


Wireless Status

Item	WLAN Status	Sidenote
Wireless mode	Enable	(AP only mode)
SSID	default	
Channel	11	
Security	None	
MAC Address	00-50-18-11-22-33	

3G/3.5G Modem Information

Item	Status	Sidenote
Card Info	No Card Detected	
Link Status	Disconnected	
Signal Strength	N/A	0~9:Bad 10~19:Good 20~31:Excellent

6. Select the **Wireless** option from the menu at the left hand side of the screen.

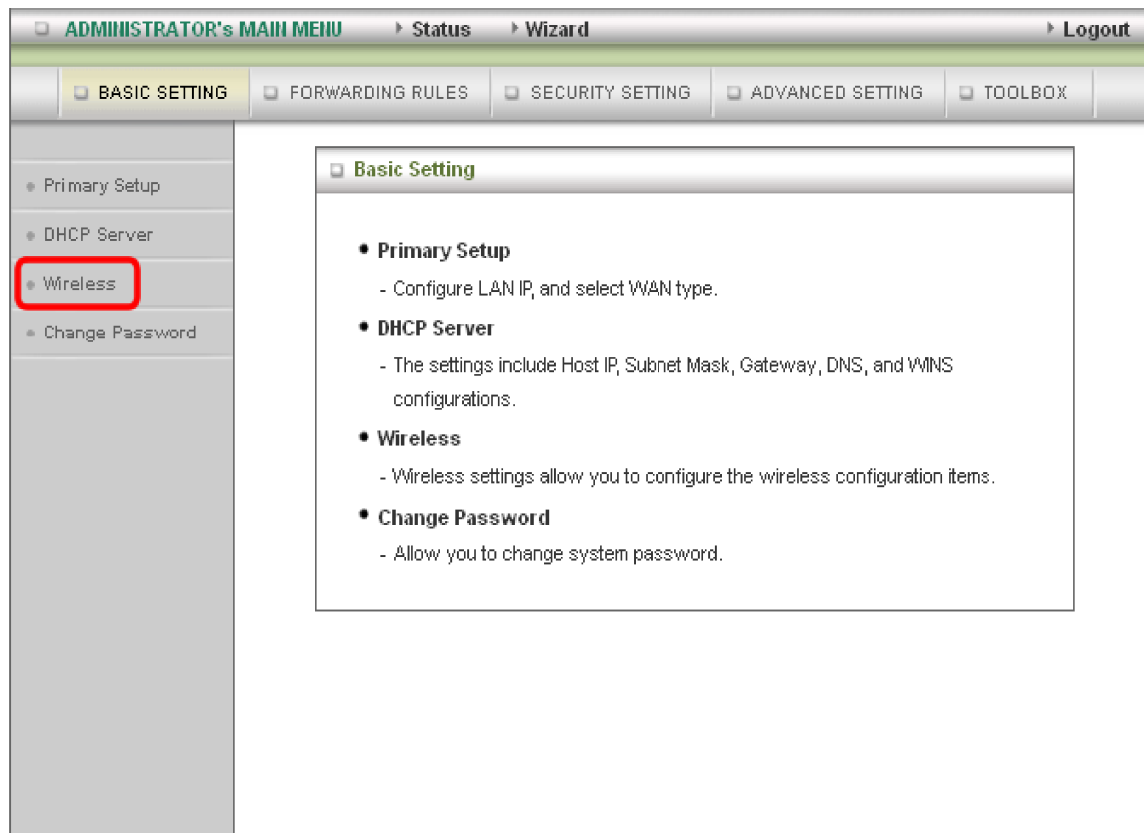

7. In the example below the **Passphrase key** is the wireless security key.

The screenshot shows the 'ADMINISTRATOR's MAIN MENU' with tabs for 'Status', 'Wizard', and 'Logout'. Below this is a navigation bar with 'BASIC SETTING', 'FORWARDING RULES', 'SECURITY SETTING', 'ADVANCED SETTING', and 'TOOLBOX'. A left sidebar lists 'Primary Setup', 'DHCP Server', 'Wireless', and 'Change Password'. The main content area is titled 'Wireless Settings' with a '[HELP]' link. It contains a table with two columns: 'Item' and 'Setting'. The 'Passphrase' row is highlighted with a red border. Below the table are 'Save', 'Undo', and 'WDS Setting' buttons.

Item	Setting
Wireless	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
WMM Capable	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
SSID	default
Channel	11
Auto Select Channel	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Security	WPA-PSK
Encryption Type	<input type="radio"/> TKIP <input checked="" type="radio"/> AES
Passphrase	a1b2c3d4e5

8. If you wish to change the wireless security key and/or the wireless encryption type (using the Security field), or change the Network name (SSID) make the selected changes and press the **Save** button.

Any changes to your wireless security settings will require you to reconnect any device connected via wireless using the new security settings of the router. Please ensure that you have your wireless setup guide handy for this.