

## Information

- Product Code: NP726
- Firmware Version: 1.70.00-EN-E
- Build Number: 1.9-1.1670.2.26
- Beta/Official: Official
- Filename: NetComm\_NP726\_1.70.00-EN-E\_1.9-1.1670.2.26.rom
- File size: 2.16MB
- Date: 13 August 2009

## Upgrade Instructions

Please refer to the following instruction for NP726 device firmware upgrade via its HTTP management interface:

**Step 1:** Connect an Ethernet cable to the LAN port of the NP726. Open the NP726 web management interface by using the following login details

Default LAN Mgt IP address: <http://192.168.10.1>

Default root user name: root


Default root Password: admin

**Step 2:** Once you are at the NP726 web management interface, navigate to **Utilities**

> **System Upgrade** > browse for the NP726 firmware file:


[NetComm\\_NP726\\_1.70.00-EN-E\\_1.9-1.1670.2.26.rom](#) then click on **Upload**. (Refer to screen shot below)

**Note:** It is strongly recommended that you back up system setting before firmware upgrade for record keeping and system maintenance.

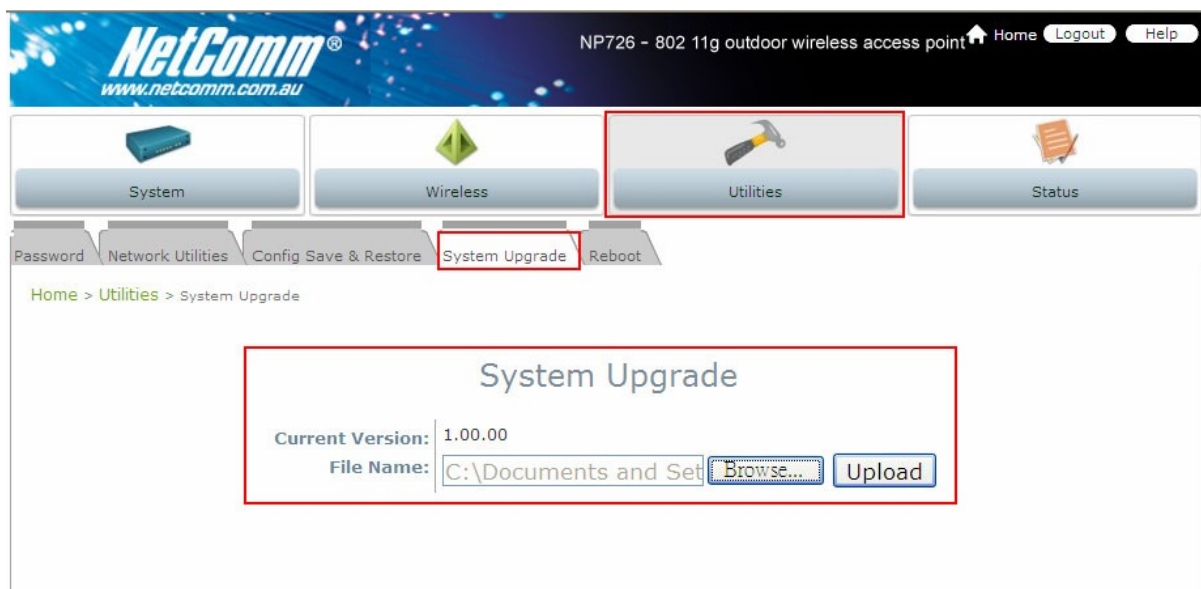

The LED light of the connected Ethernet port will now flash rapidly as the firmware is being transferred to the NP726.

**Step 3:** Please note that NP726 firmware upgrade may take couple minutes, please wait for the firmware upgrade status bar to complete and wait for the following Status page to appear after system restart.

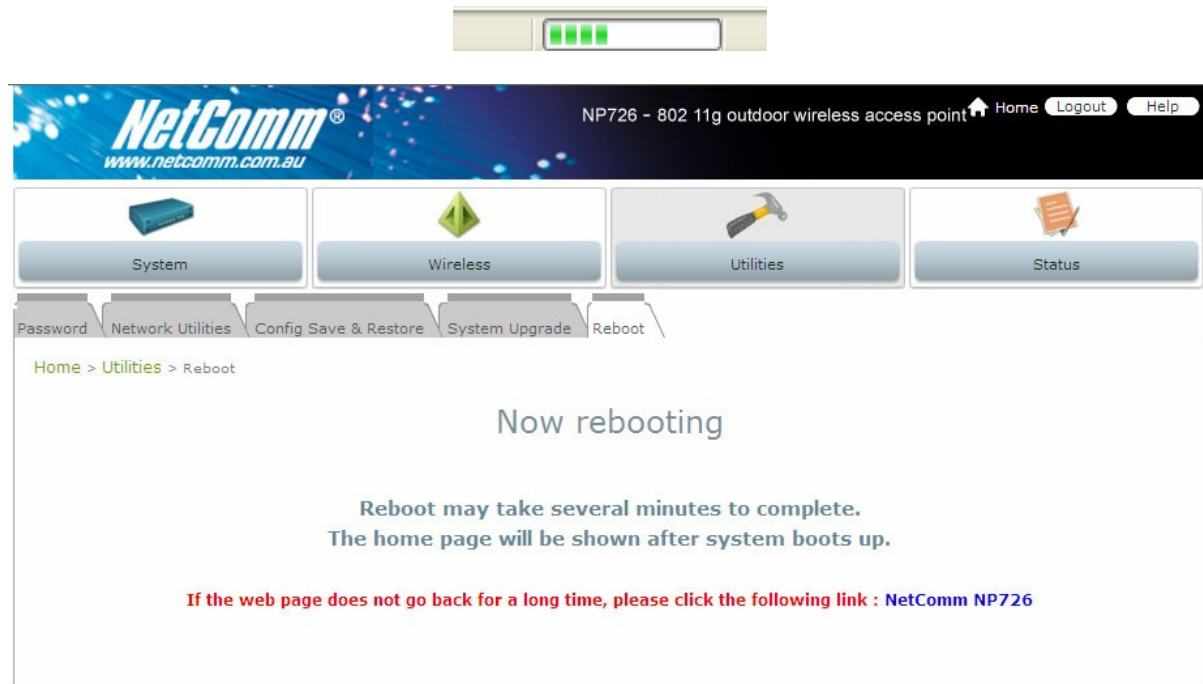

**Step 4:** Once the system finished booting up, the 'WLAN' LED at the physical panel will be on *solid green*.



- |              |  |
|--------------|--|
| 1. Power:    | Green LED ON indicates power on, and OFF indicates power off.  |
| 2. WLAN:     | Green LED ON indicates system ready.   |
| 3. Ethernet: | Green LED ON indicates connection, OFF indicates no connection and BLINKING indicates transmitting data. |

NP726 firmware upgrade is now completed.

Note: Please note that centrally manage the NetComm NP725 and NP726 indoor and out door AP by the IAC3000, the following firmware should be used together.

IAC3000: FW 2.00.01\_01000 (or later)

NP725: FW 1.10.00 (or later)

NP726: FW 1.70.00 (or later)

## New Features

### **1.70.00-EN-E\_1.9-1.1670.2.26**

1. Add internal power adjustment capability when AP works with IAC3000's AP load balancing.
2. Add internal capability for rogue AP detection when AP works with IAC3000's rogue AP detection.

## Bug Fixes / Modifications

## Known Issue