




NetComm Wireless

USB Storage Setup Guide (NB604N)

Configuring NB604N for USB storage service

This guide will take you through the steps of accessing the USB storage device through the router. Ensure that the USB storage device is already connected to the USB port of the router before proceeding with the guide.

1. Navigate to <http://192.168.1.1> in a web browser.

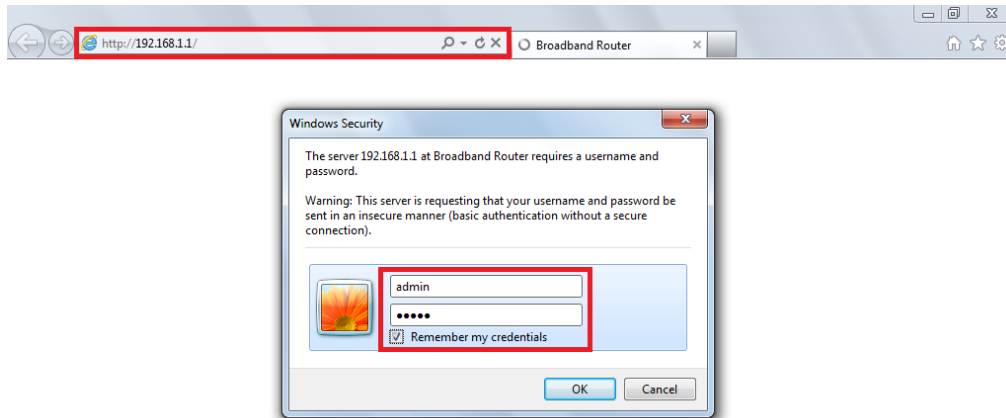

2. Enter "admin" for both username and password when prompted then click **OK**.
3. Go to Advanced Setup > Storage Service > **Storage Device Info** and check that there is an entry in the Storage Service Table. An entry in the table means that there is a USB storage device connected to the router.

NetComm


Device Info
Basic setup
Advanced Setup
Layer 2 Interface
WAN Service
LAN
NAT
Security
Parental Control
Quality of Service
Routing
DNS
DSL
UPnP
DNS Proxy
Packet Acceleration
Storage Service
Storage Device Info
User Accounts
Interface Grouping
IPSec
Power Management

Storage Service


The Storage service allows you to use Storage devices with modem to be more easily accessed

Volume Name	Physical Medium	File System	Total Space	Used Space
usb1_1	PhysicalMedium.1	vfat	7632MB	2635MB

4. Go to Advanced Setup > Storage Service > **User Accounts** then click **Add**.

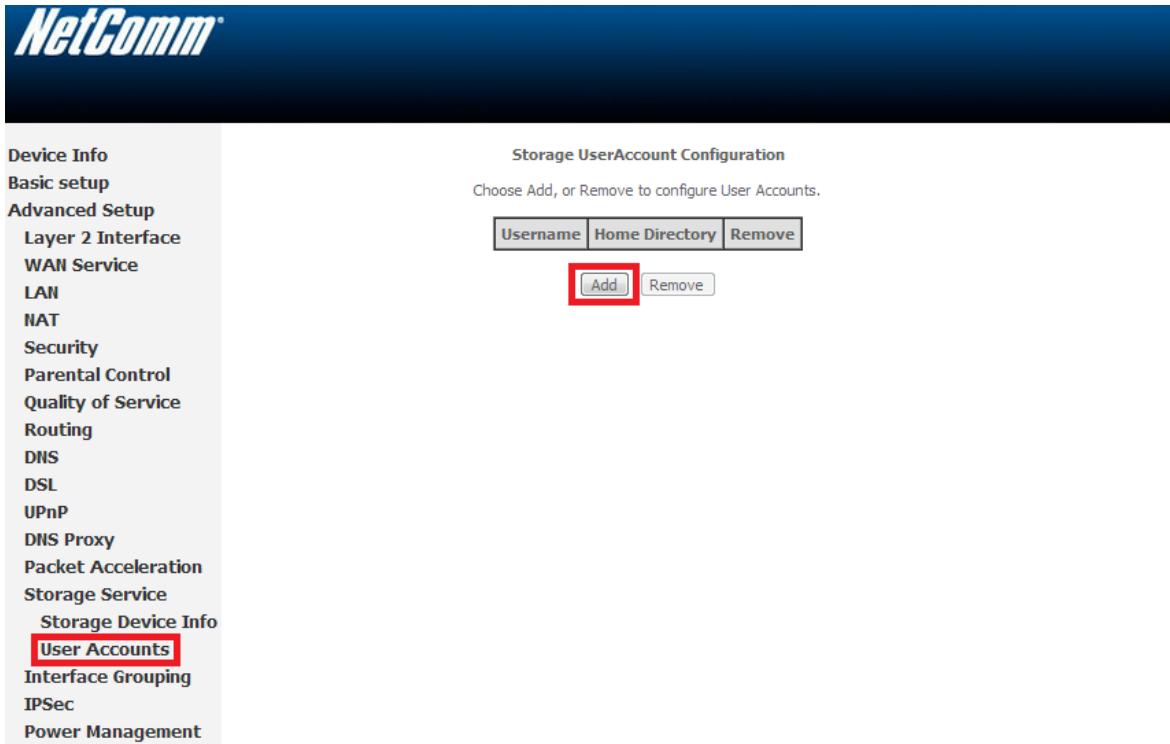

5. Create a new user for the storage service then click on **Save**. The example below shows that the new username is "netcomm". Take note of the username and password as you will need it later on to access the USB storage device.

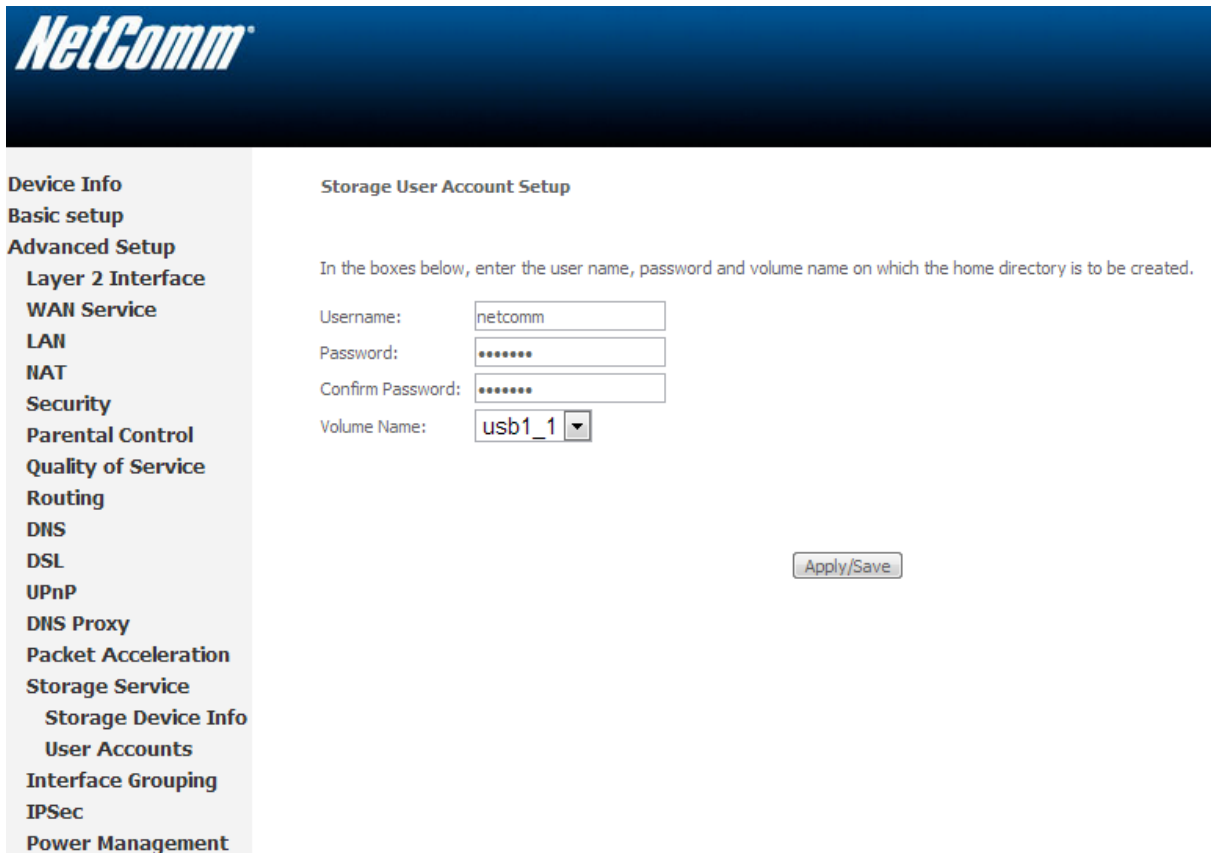

6. Once you have clicked **Apply/Save**, you will see that the user has been created.



- Device Info
- Basic setup
- Advanced Setup
 - Layer 2 Interface
 - WAN Service
 - LAN
 - NAT
 - Security
 - Parental Control
 - Quality of Service
 - Routing
 - DNS
 - DSL
 - UPnP
 - DNS Proxy
 - Packet Acceleration
 - Storage Service
 - Storage Device Info
 - User Accounts
 - Interface Grouping
 - IPSec
 - Power Management

Storage UserAccount Configuration


Choose Add, or Remove to configure User Accounts.

Username	Home Directory	Remove
netcomm	usb1_1/netcomm	<input type="checkbox"/>


Accessing USB hard drive Connected to NB604N using a Windows PC

1. Now exit out from the NetComm router's WEB Interface page and open up the "Windows Explorer" and type \\192.168.1.1 on the top address bar.


Note: *Windows Explorer* is different from the *Internet Explorer*. You can open a Windows Explorer by opening *Computer* or *Documents*.

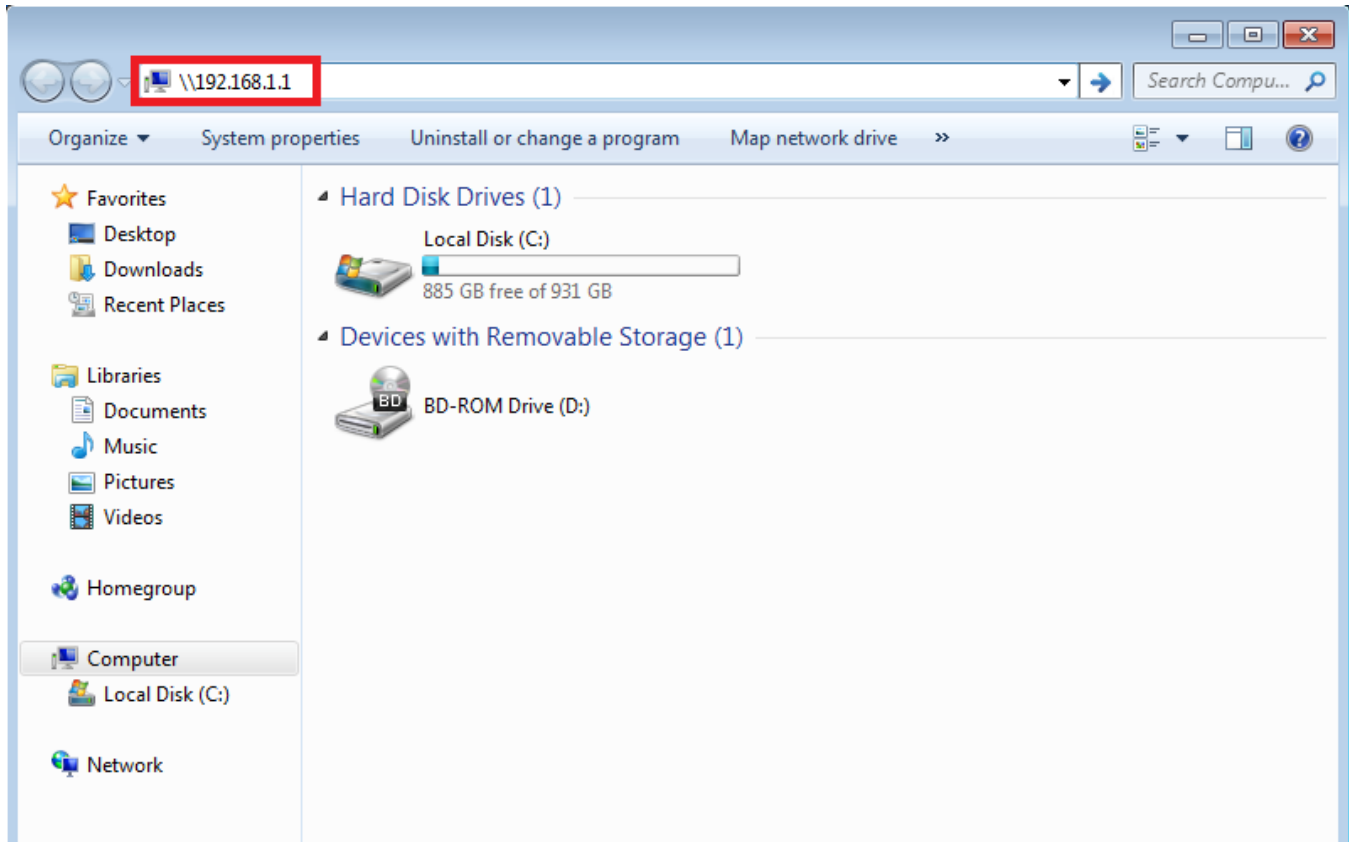

2. When prompted for login details, type the Storage User Account username and password. The example below uses "netcomm" as the username.

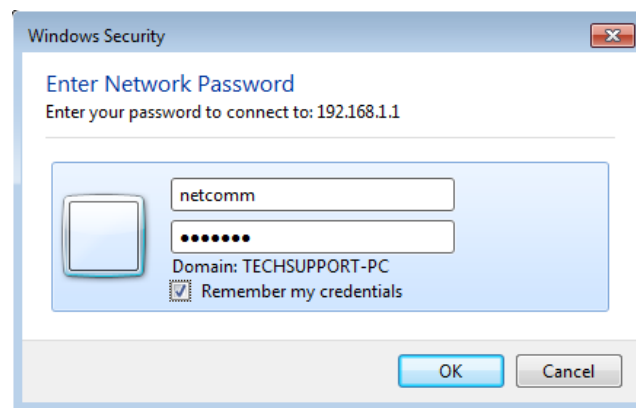


3. Once you have logged in, you will be able to view and edit the contents of the USB storage device.

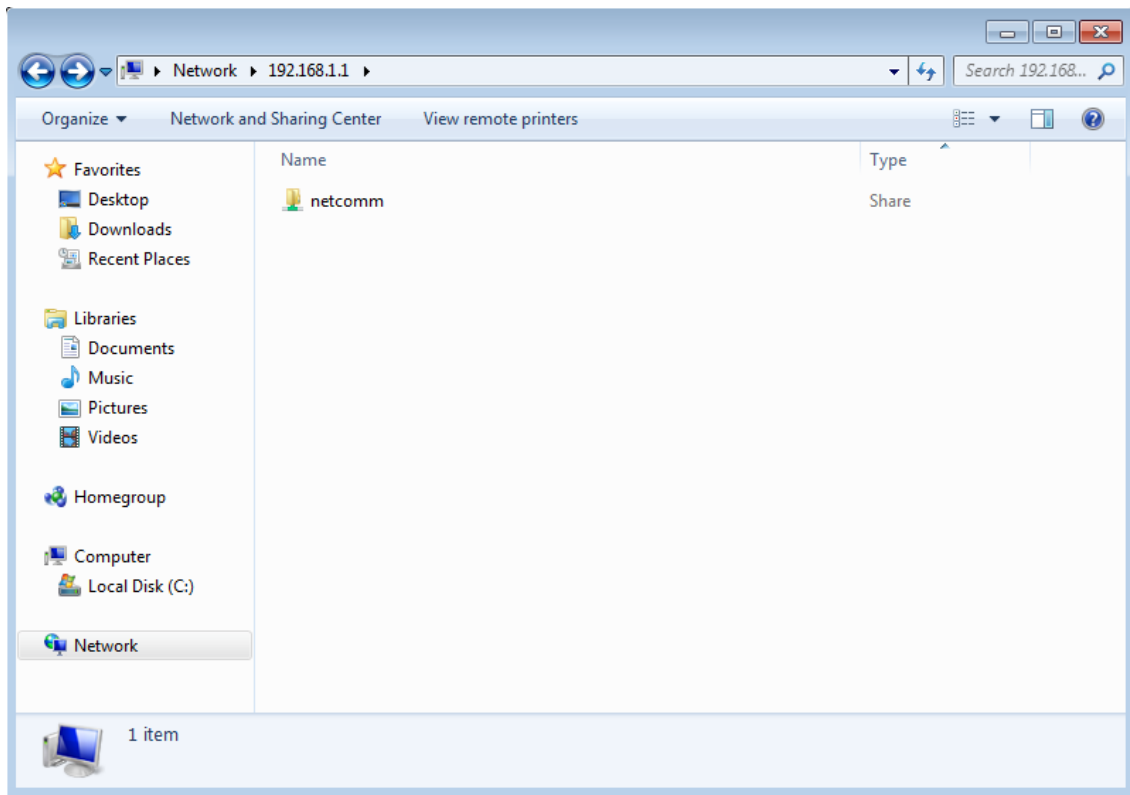


Accessing USB hard drive Connected to NB604N using a Mac PC


1. On you Mac click on Go > Connect to a Server.

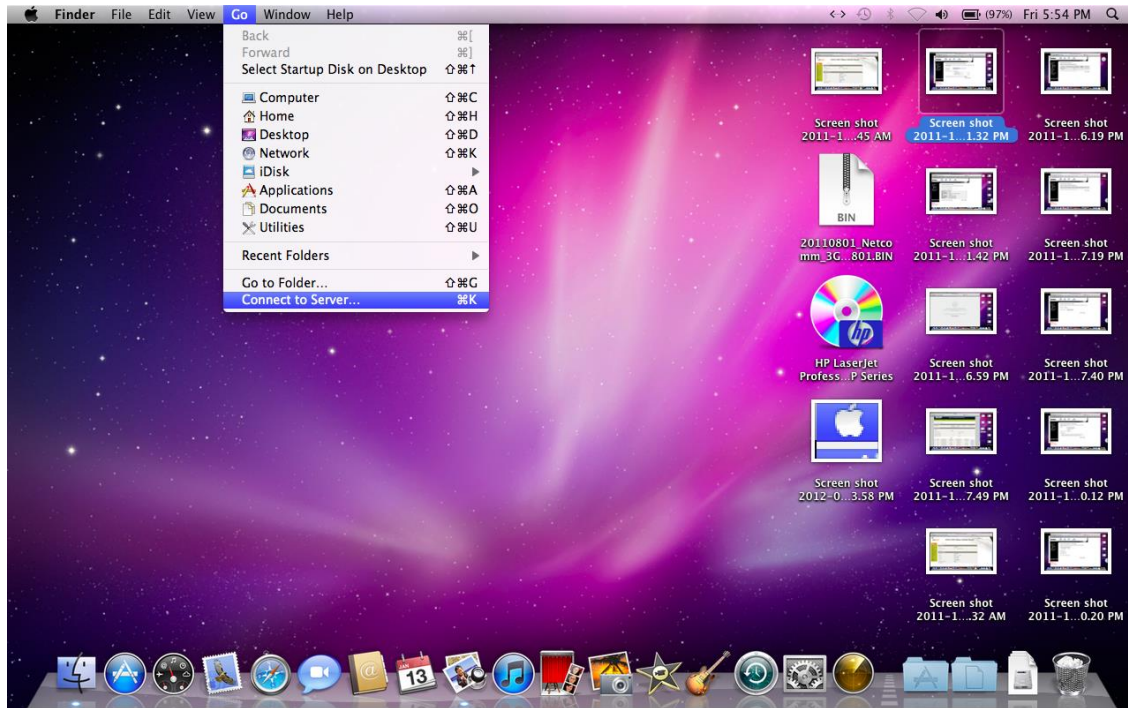

2. Enter the path to the network drive you want to map, ie: **smb://192.168.1.1** then click **Connect**.

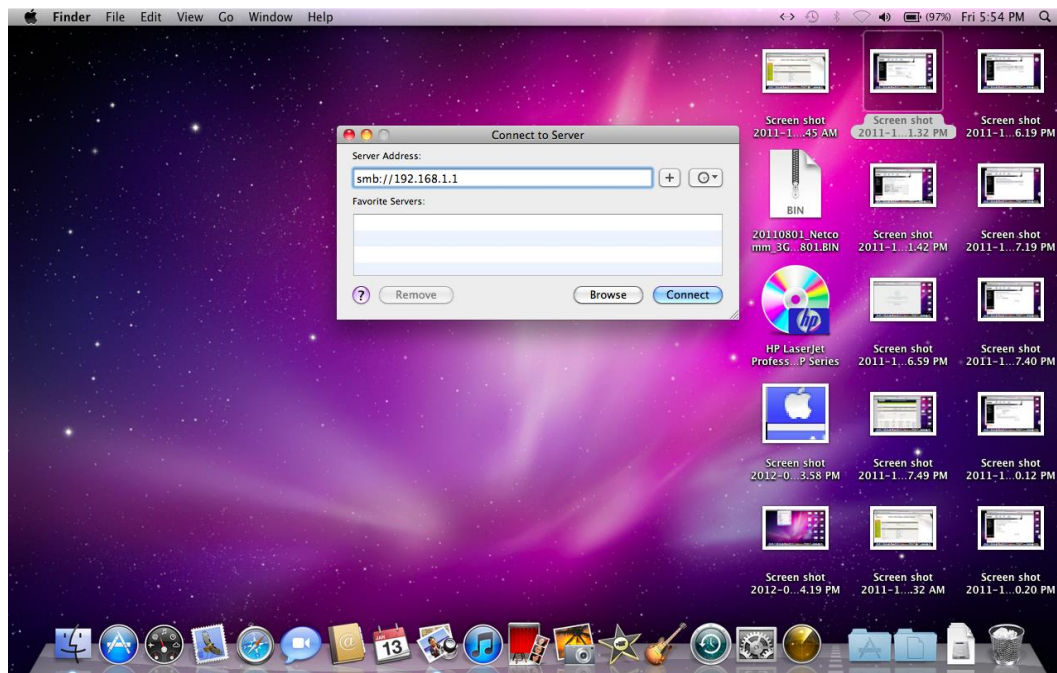

3. Enter your Storage User Account username and password as shown below and click **OK** to mount the network drive.

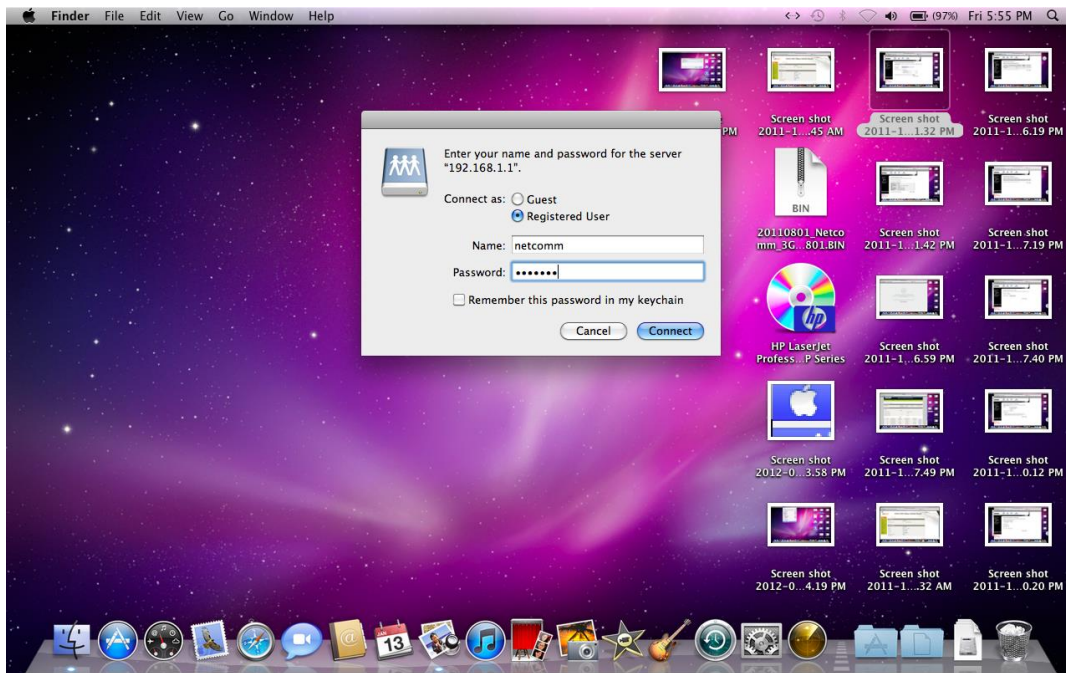

4. The drive will now appear on your desktop and in the finder window sidebar

