




# USB Storage Service

## Modem Router - **NF4V**

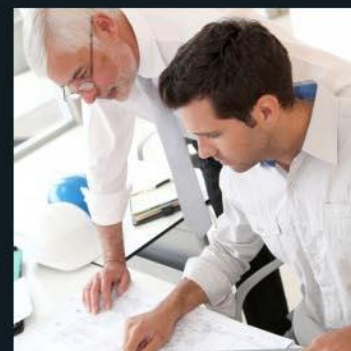

**NetCommWireless**

**NF4V**

# Storage Service

The Storage Service options enable you to manage attached USB Storage devices and create accounts to access the data stored on the attached USB device.

## Storage Device Info


The storage device info page displays information about the attached USB Storage device.

## LOGGING IN TO THE WEB INTERFACE

1. Open a web browser (such as Internet Explorer, Google Chrome or Firefox), type **http://192.168.20.1** into the address bar and press **enter**.
2. At the login screen, type **admin** into both the Username and the Password fields and click **OK**.



3. Click on the **Advanced Setup** menu at the left of the page and then click on **Storage Service** option

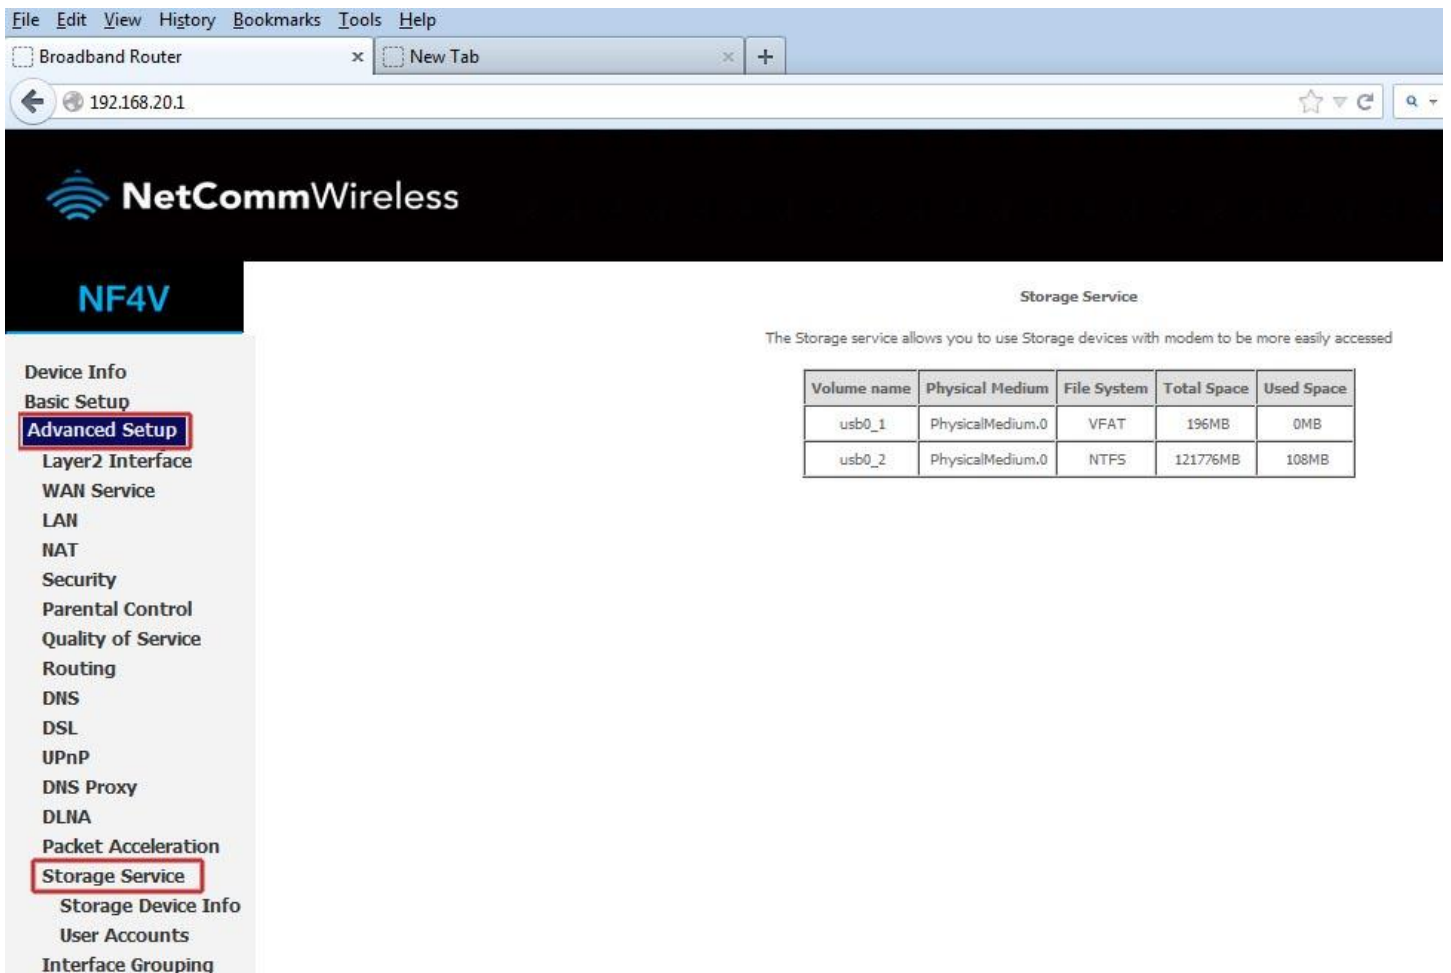

The screenshot shows the NetCommWireless NF4V web interface. The 'Advanced Setup' menu is highlighted, and the 'Storage Service' option is selected. The main content area shows the 'Storage Service' page with a table of USB storage devices.

**Storage Service**

The Storage service allows you to use Storage devices with modem to be more easily accessed

| Volume name | Physical Medium  | File System | Total Space | Used Space |
|-------------|------------------|-------------|-------------|------------|
| usb0_1      | PhysicalMedium.0 | VFAT        | 196MB       | 0MB        |
| usb0_2      | PhysicalMedium.0 | NTFS        | 121776MB    | 108MB      |

- click on **User Accounts** option.  
User accounts are used to restrict access to the attached USB Storage device.  
To delete a User account entry, click the Remove checkbox next to the selected account entry and click Remove.  
Click Add to create a user account.

The screenshot shows the NetCommWireless NF4V web interface. On the left is a navigation menu with 'User Accounts' highlighted. The main content area is titled 'Storage User Account Configuration' and contains a table with columns 'Username' and 'Remove'. The table lists 'admin', 'user1', 'user2', and 'user3'. The 'Remove' checkbox for 'user3' is checked. Below the table are 'Add' and 'Remove' buttons.

| Username | Remove                              |
|----------|-------------------------------------|
| admin    | <input type="checkbox"/>            |
| user1    | <input type="checkbox"/>            |
| user2    | <input type="checkbox"/>            |
| user3    | <input checked="" type="checkbox"/> |

Buttons: Add, Remove

- Adding an account allows the creation of specific user accounts with a password to further control access permissions.  
To add an account, click the Add button and then enter the desired username and password for the account.

The screenshot shows the 'Storage User Account Setup' page. It includes a navigation menu with 'User Accounts' highlighted. The main content area has a form with three input fields: 'Username' (containing 'user3'), 'Password' (masked with dots), and 'Confirm Password' (masked with dots). A note above the form states: 'Please enter the username and password to be used for Network Attached Storage. Username and Password may only consist of characters ([A-Z] or [a-z]) and numbers [0-9].'. An 'Apply/Save' button is located at the bottom right.

Username: user3  
Password: .....  
Confirm Password: .....


Apply/Save

## Accessing USB hard drive Connected to NF4V using a Windows PC

1. Now exit out from the NetComm router's WEB Interface page and open up the "Windows Explorer" and type \\192.168.20.1 on the top address bar.

Note: Windows Explorer is different from the Internet Explorer. You can open a Windows Explorer by opening Computer or Documents.


( Note : Turn off firewall/ antivirus firewall if it has no connection to USB storage through Wireless.)

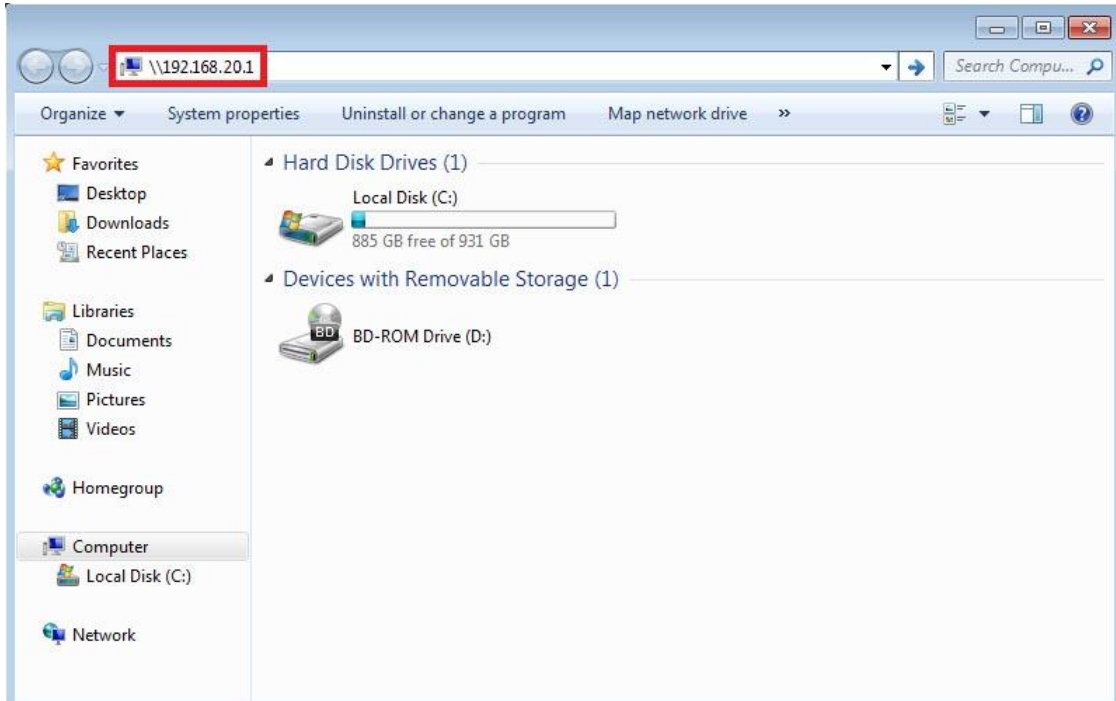

2. When prompted for login details, type the Storage User Account **username** and **password**. The example below uses "user1" as the username.




3. Once you have **logged in**, you will be able to **view and edit** the contents of the USB storage device.

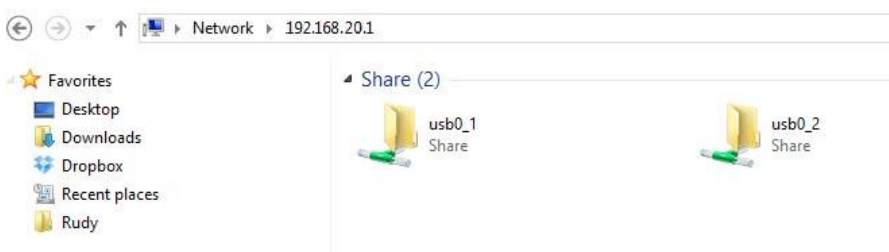


# Accessing USB hard drive Connected to NF4V using a Mac PC


1. On you Mac click on **Go >Connect to a Server**.

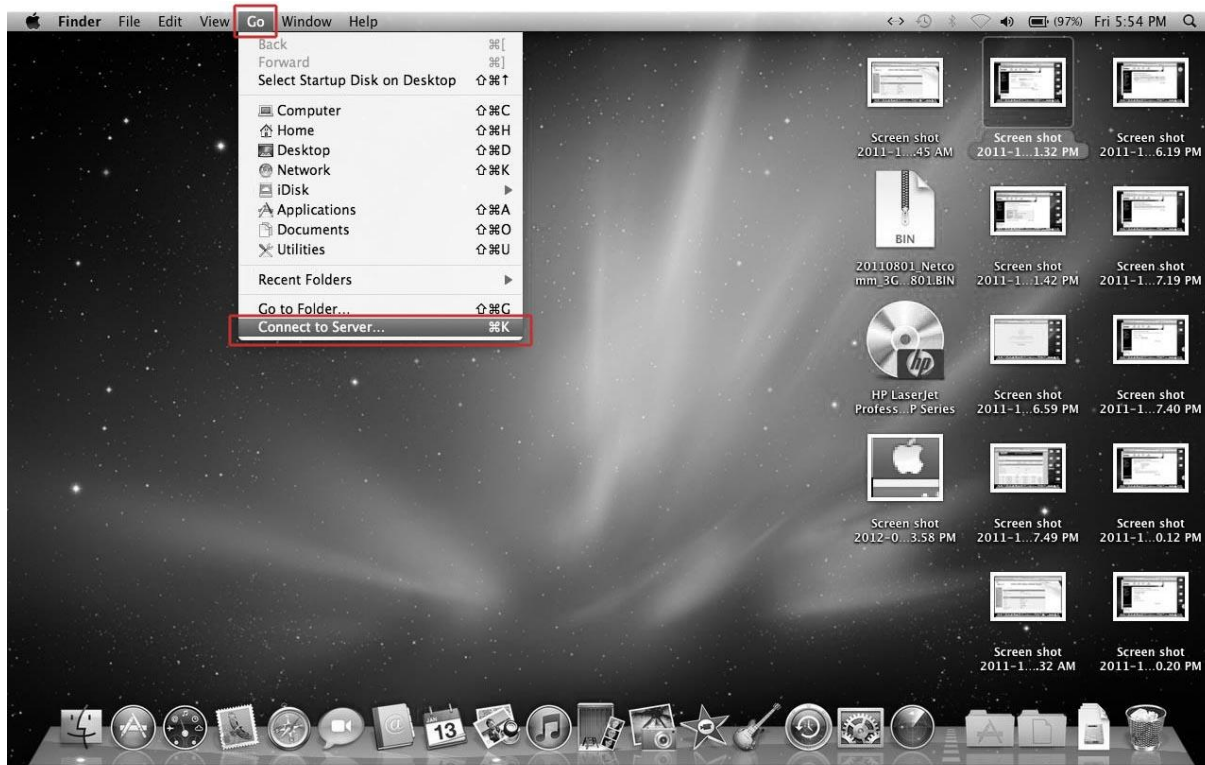

2. Enter the path to the network drive you want to map, ie: **smb://192.168.20.1** then click **Connect**.

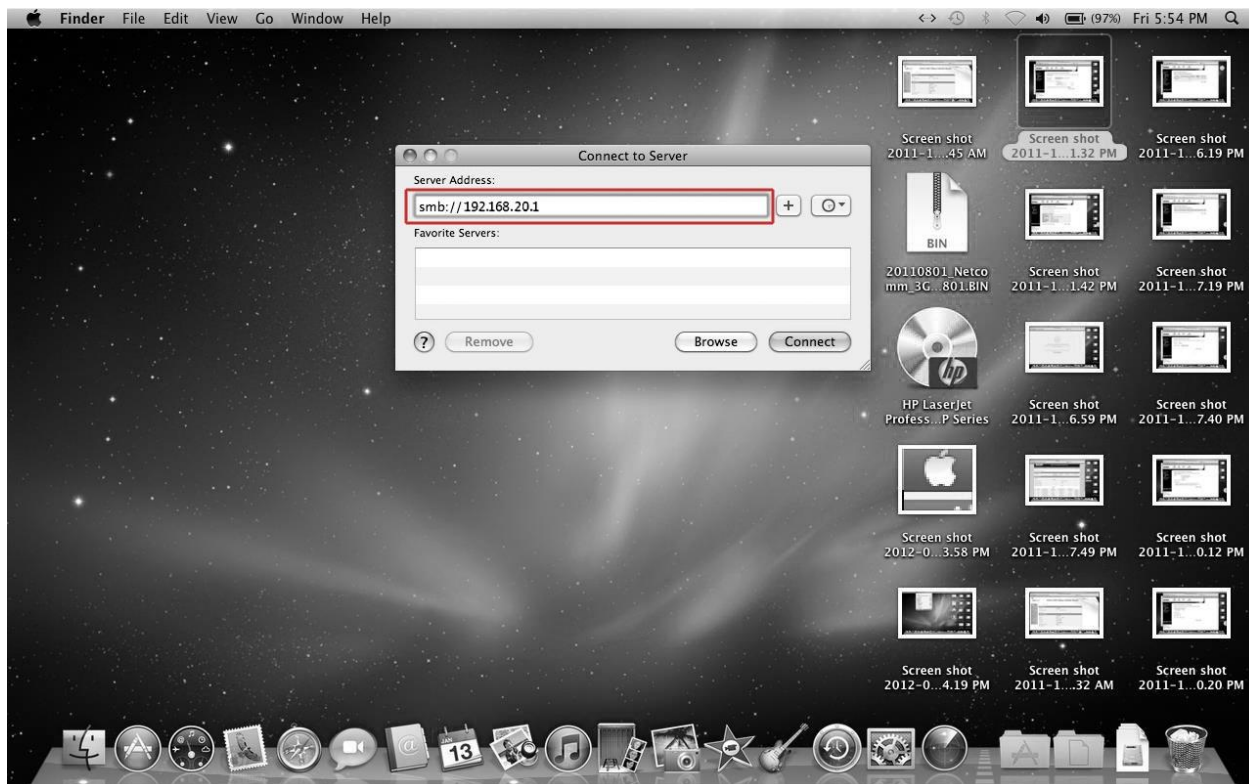

3. Enter your Storage User Account username and password as shown below and click **OK** to mount the network drive.

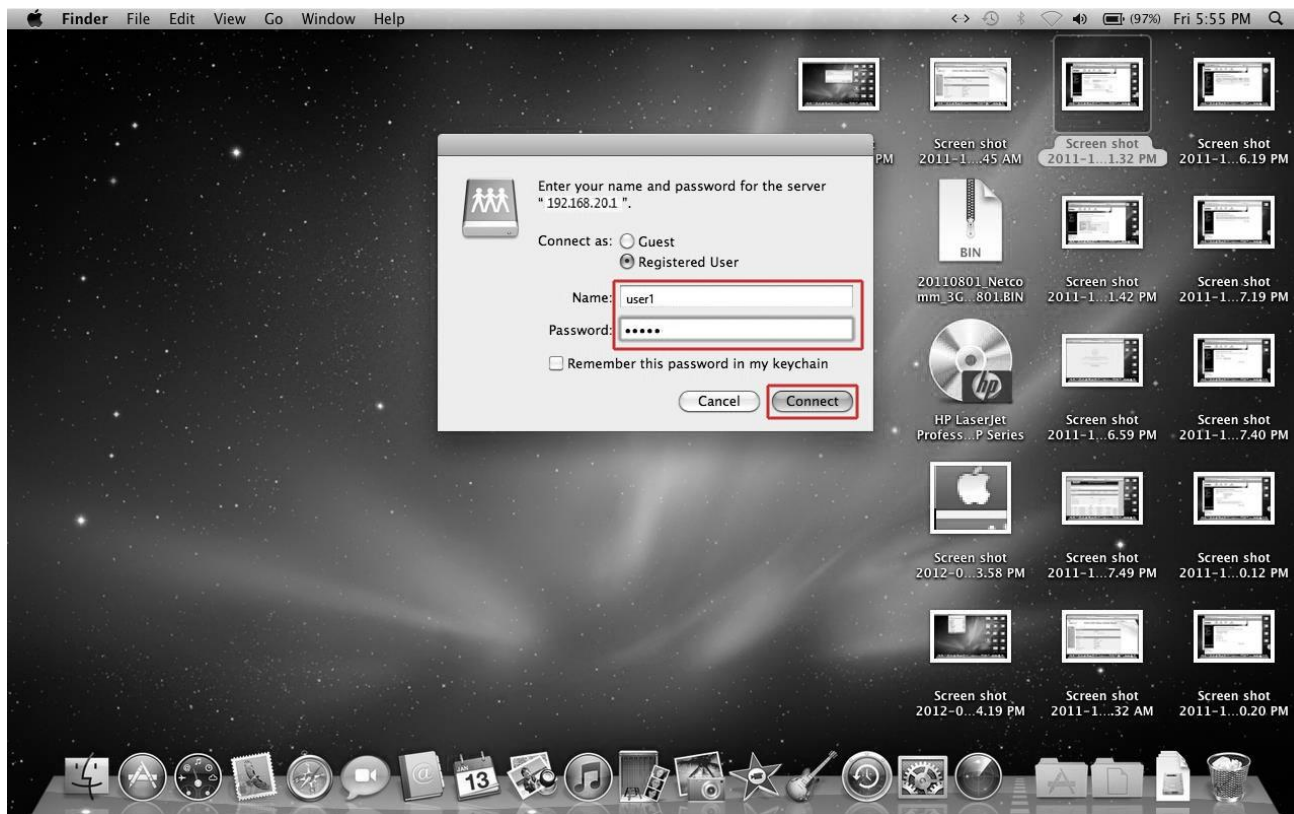

4. The drive will now appear on your **finder window sidebar**



NetCommWireless

NF4V