




IPTV Setup
(NB7PLUS4W)

IPTV


This guide will take you through the process of configuring a VLAN on your modem / router to work with IPTV.

1. Navigate to <http://192.168.1.1> in a web browser.
2. Enter 'admin' for both the username and password when prompted.
3. Select Advanced > WAN.

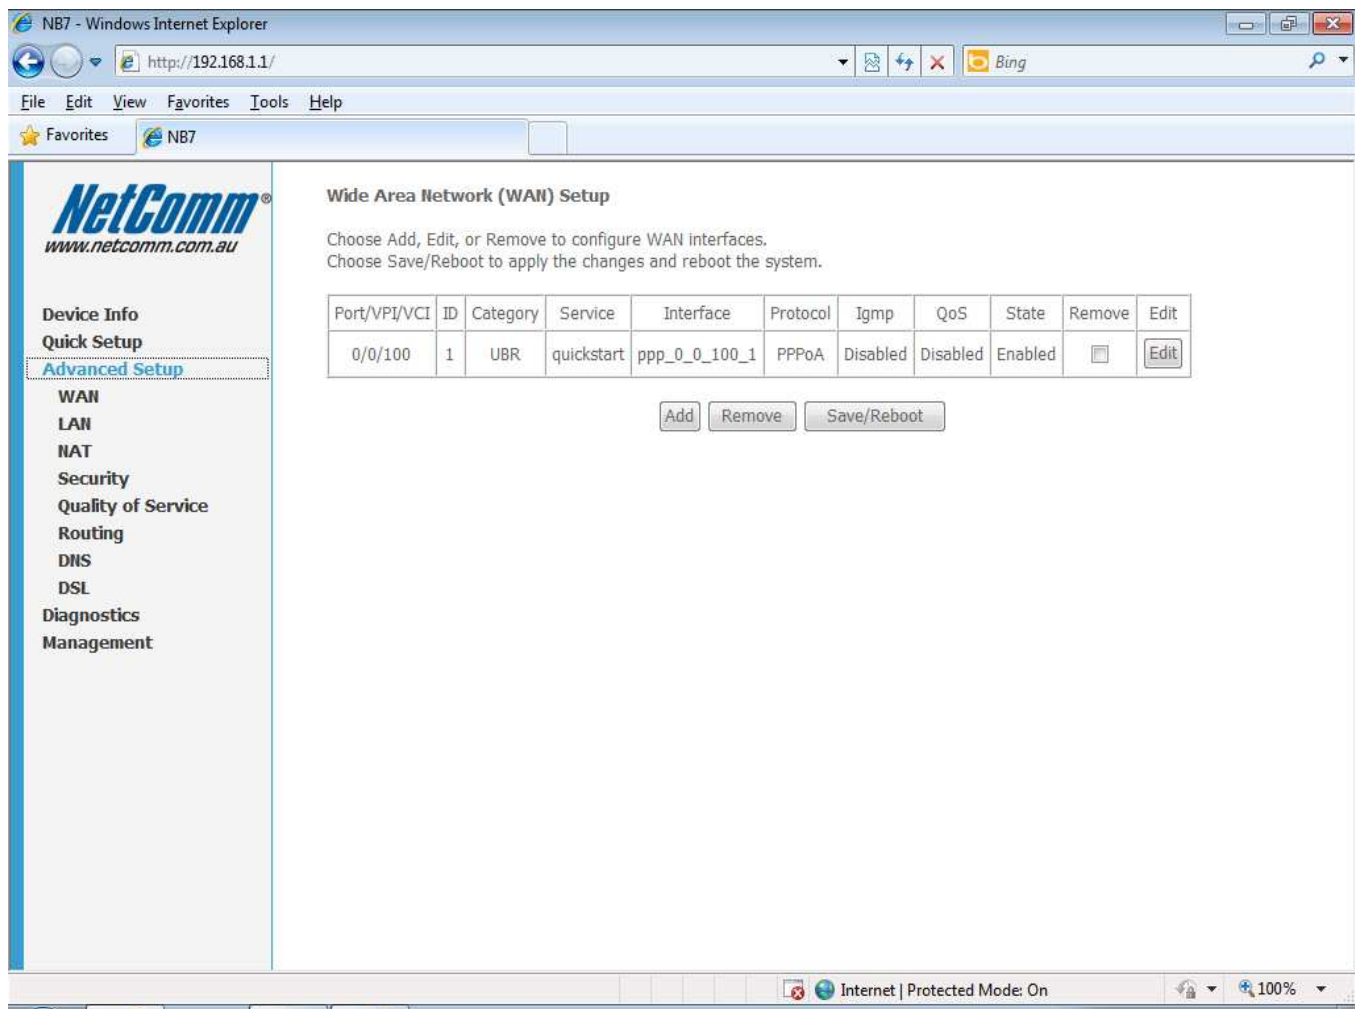


4. Press the Add button.

5. Enter 0 into the VPI field and 35 for the VCI field with UBR Without PCR as the Service Category. Quality of Service is optional.

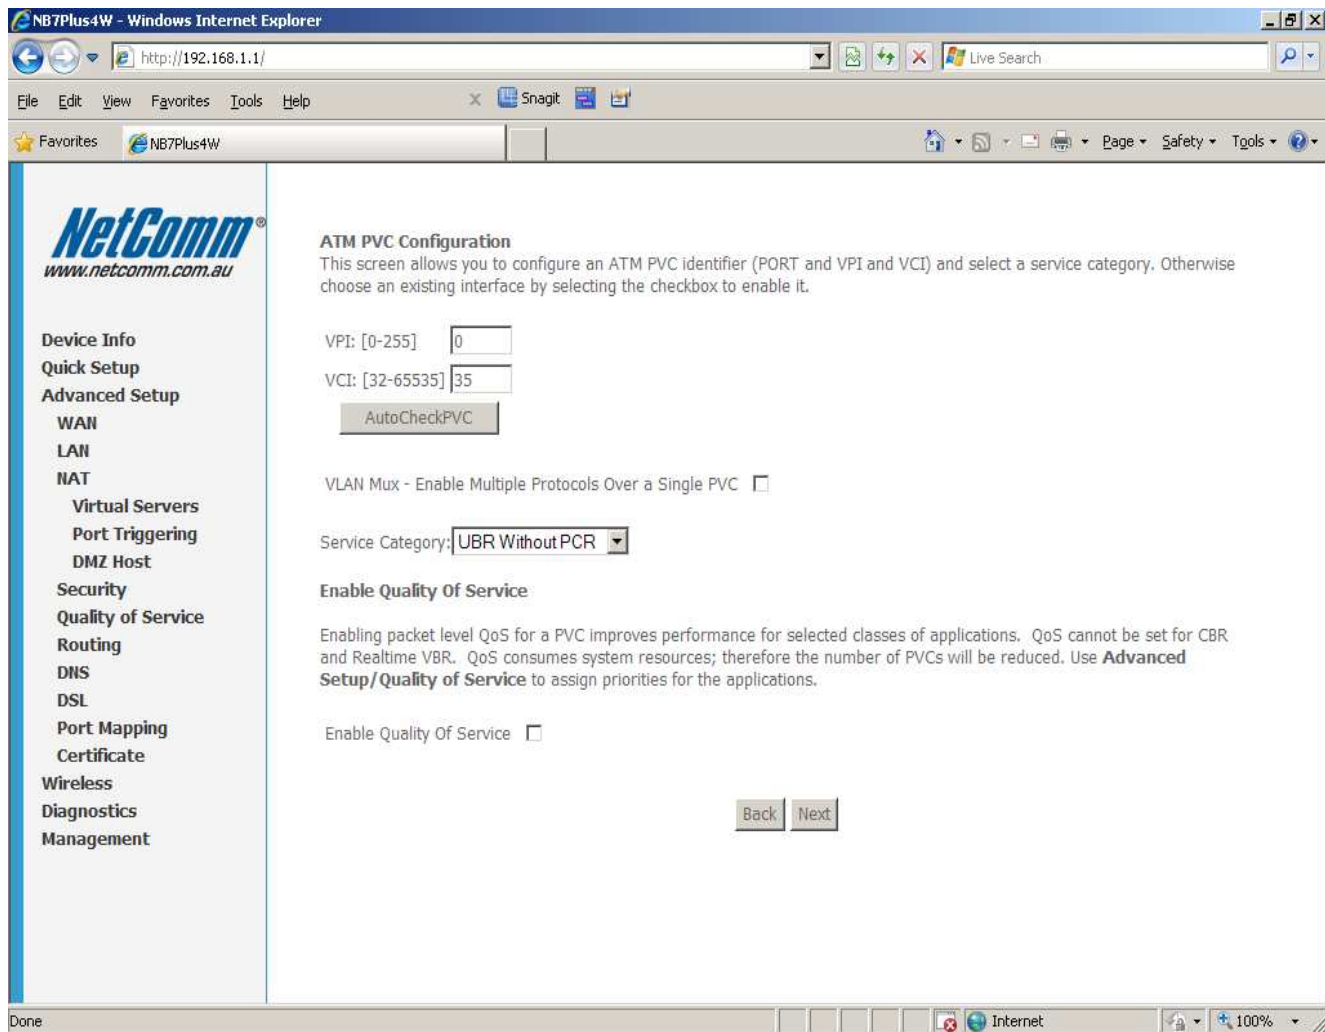


6. Press the Next button.

7. Select Bridging as the connection type with LLC/SNAP-BRIDGING as the encapsulation type.

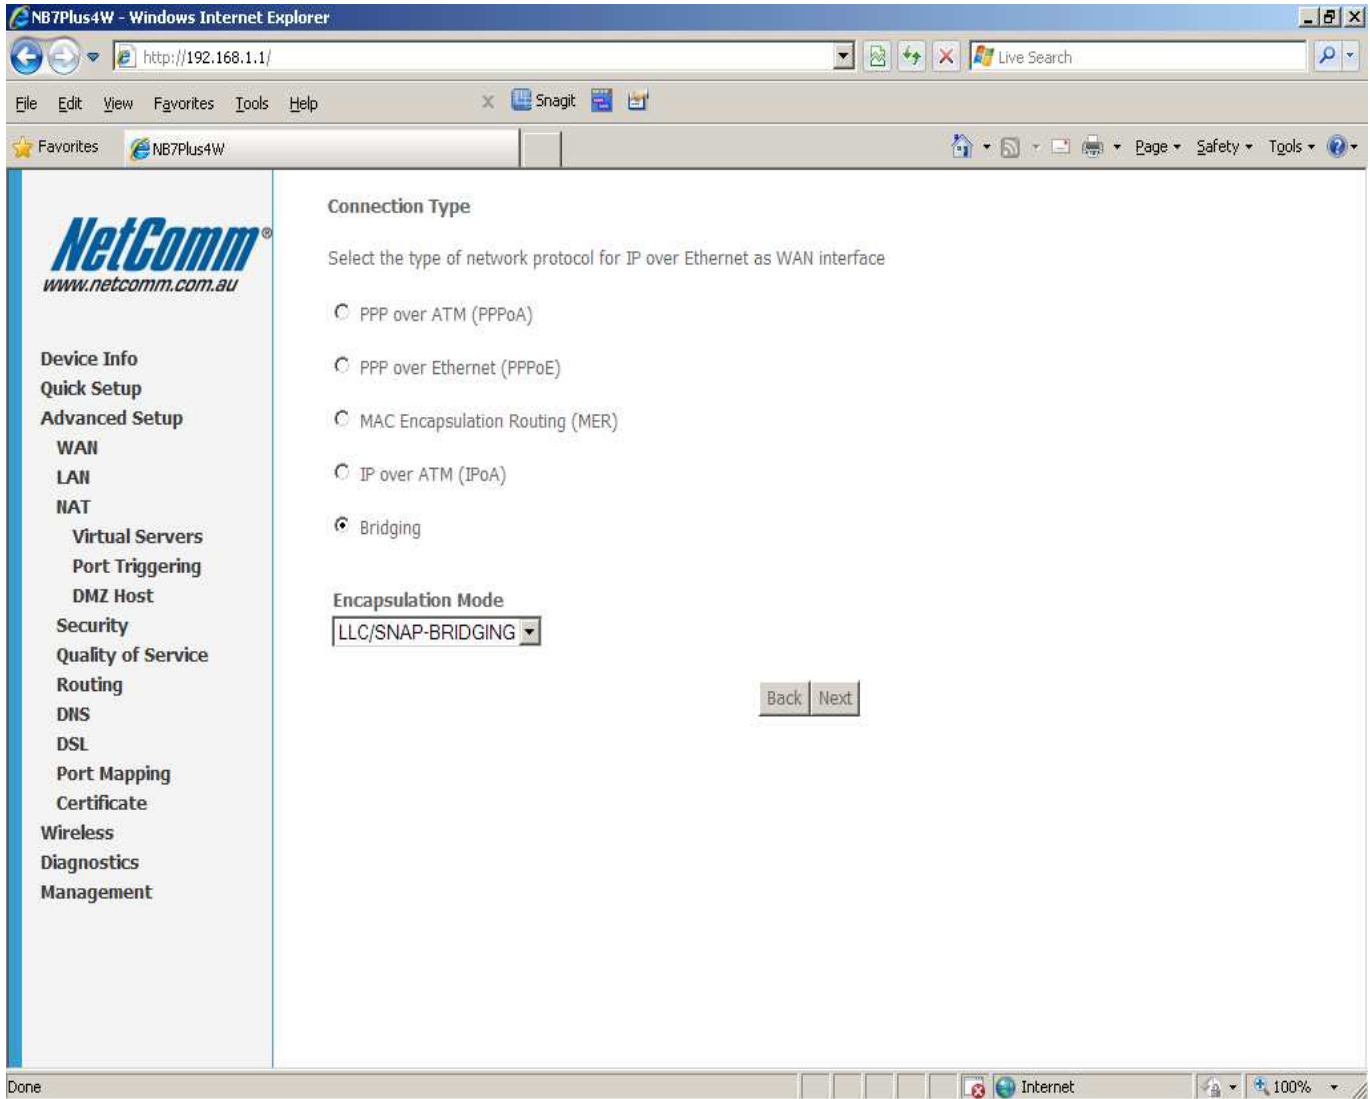

8. Press the Next button.

9. Select 'Enable Bridge Service'. You may change the connection name to something descriptive such as 'IPTV' if you prefer.

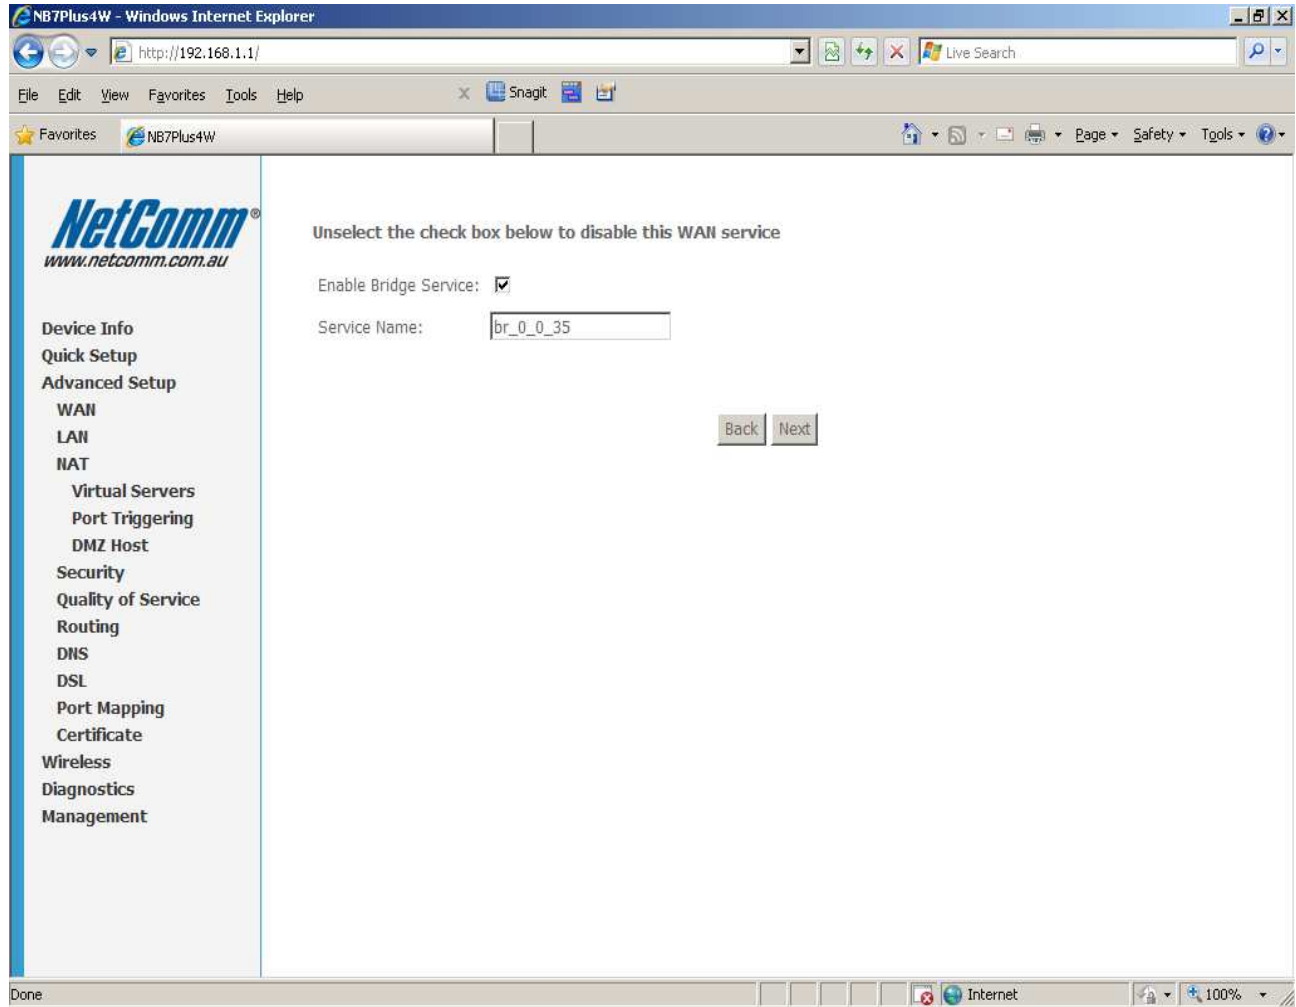

10. Press the Next button.

11. Check the WAN setup summary before pressing the Save button.

The screenshot shows a Windows Internet Explorer browser window displaying the NetComm NB7Plus4W WAN Setup Summary page. The browser's address bar shows the URL <http://192.168.1.1/>. The page title is "WAN Setup - Summary".

On the left side, there is a navigation menu with the following items: Device Info, Quick Setup, Advanced Setup, WAN (selected), LAN, NAT, Virtual Servers, Port Triggering, DMZ Host, Security, Quality of Service, Routing, DNS, DSL, Port Mapping, Certificate, Wireless, Diagnostics, and Management.


The main content area is titled "WAN Setup - Summary" and includes the instruction: "Make sure that the settings below match the settings provided by your ISP." Below this is a table of settings:

PORT / VPI / VCI:	0 / 0 / 35
Connection Type:	Bridge
Service Name:	br_0_0_35
Service Category:	UBR
IP Address:	Not Applicable
Service State:	Enabled
NAT:	Enabled
Firewall:	Enabled
IGMP Multicast:	Not Applicable
Quality Of Service:	Disabled

Below the table, there is a note: "Click 'Save' to save these settings. Click 'Back' to make any modifications." and a further instruction: "NOTE: You need to reboot to activate this WAN interface and further configure services over this interface." At the bottom of the main content area, there are two buttons: "Back" and "Save".

The browser's status bar at the bottom shows "Done" and "Internet".

12. Select Advanced Setup > LAN.

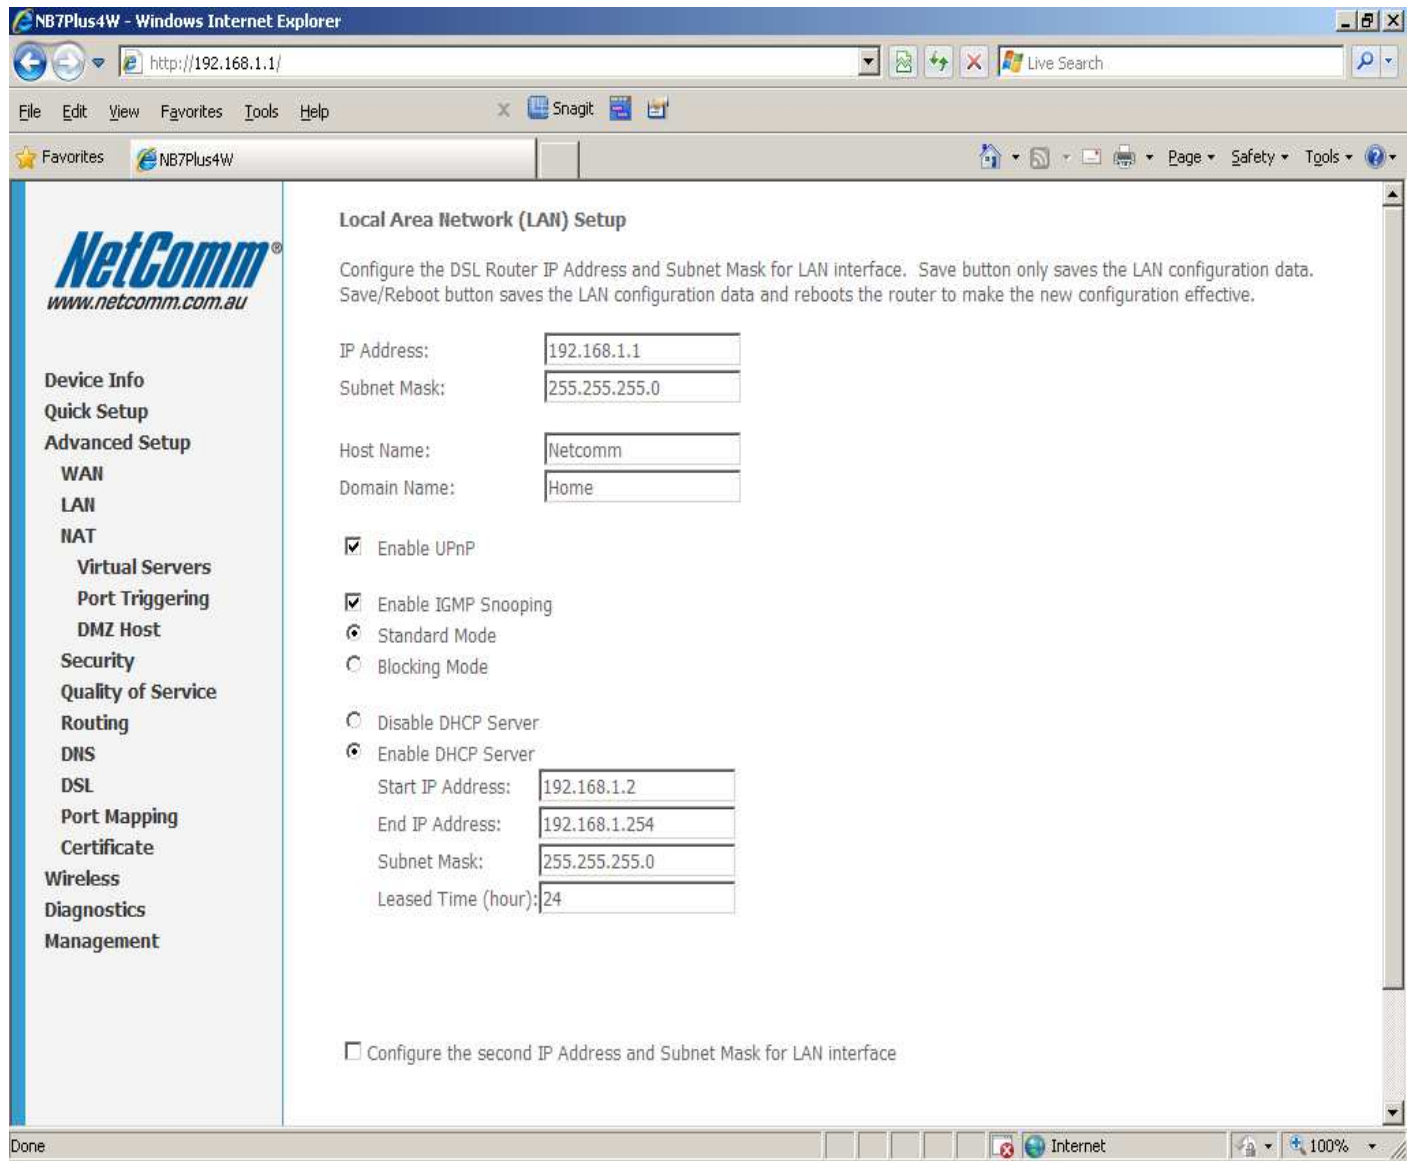

13. Select Enable IGMP Snooping and Enable UPnP. Press Save/Apply.

Your modem / router should now be able to utilise your IPTV service.