


**Configuring V90 with TPG VoIP Settings.**

1. Navigate to <http://192.168.1.11> in a web browser.




2. Enter "admin" for both username and password when prompted. (without quotes)

3. The main configuration page of the V90 will open. Select "Configuration" from the options on the left hand side.

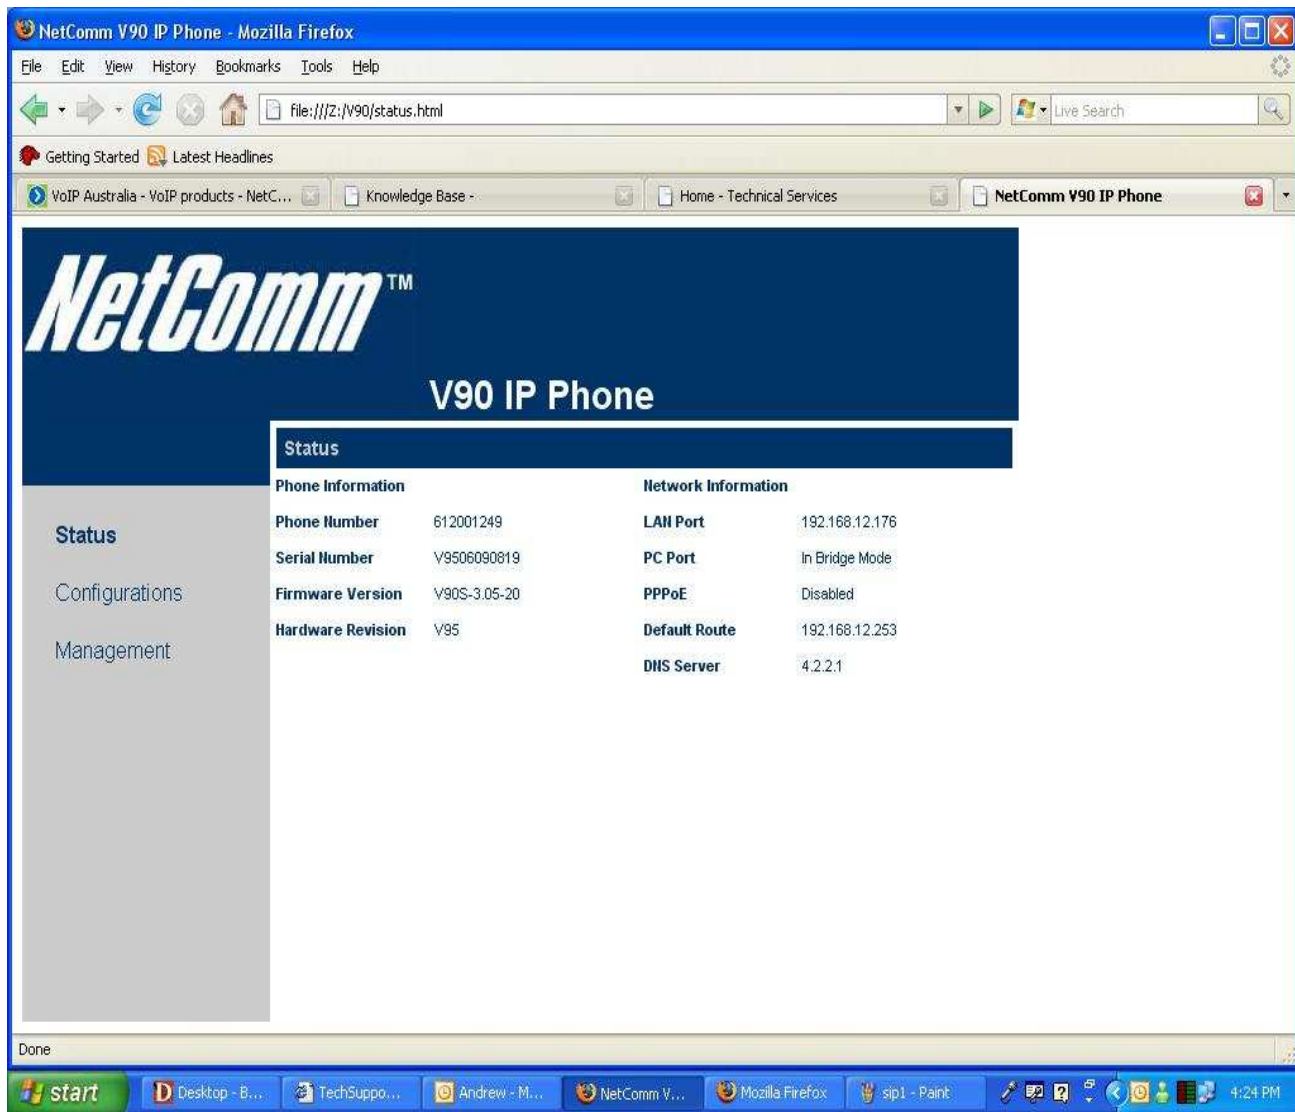

4. Now click on "Call setting" and then type in the following information.
- Phone Number                    TPG number
  - Display Number                TPG number
  - Auth. ID                         TPG number
  - Auth. Password                TPG Password
  - SIP proxy                        aphone3.tpg.com.com
  - SIP registrar                  aphone3.tpg.com.com
  - Domain Address                aphone3.tpg.com.com

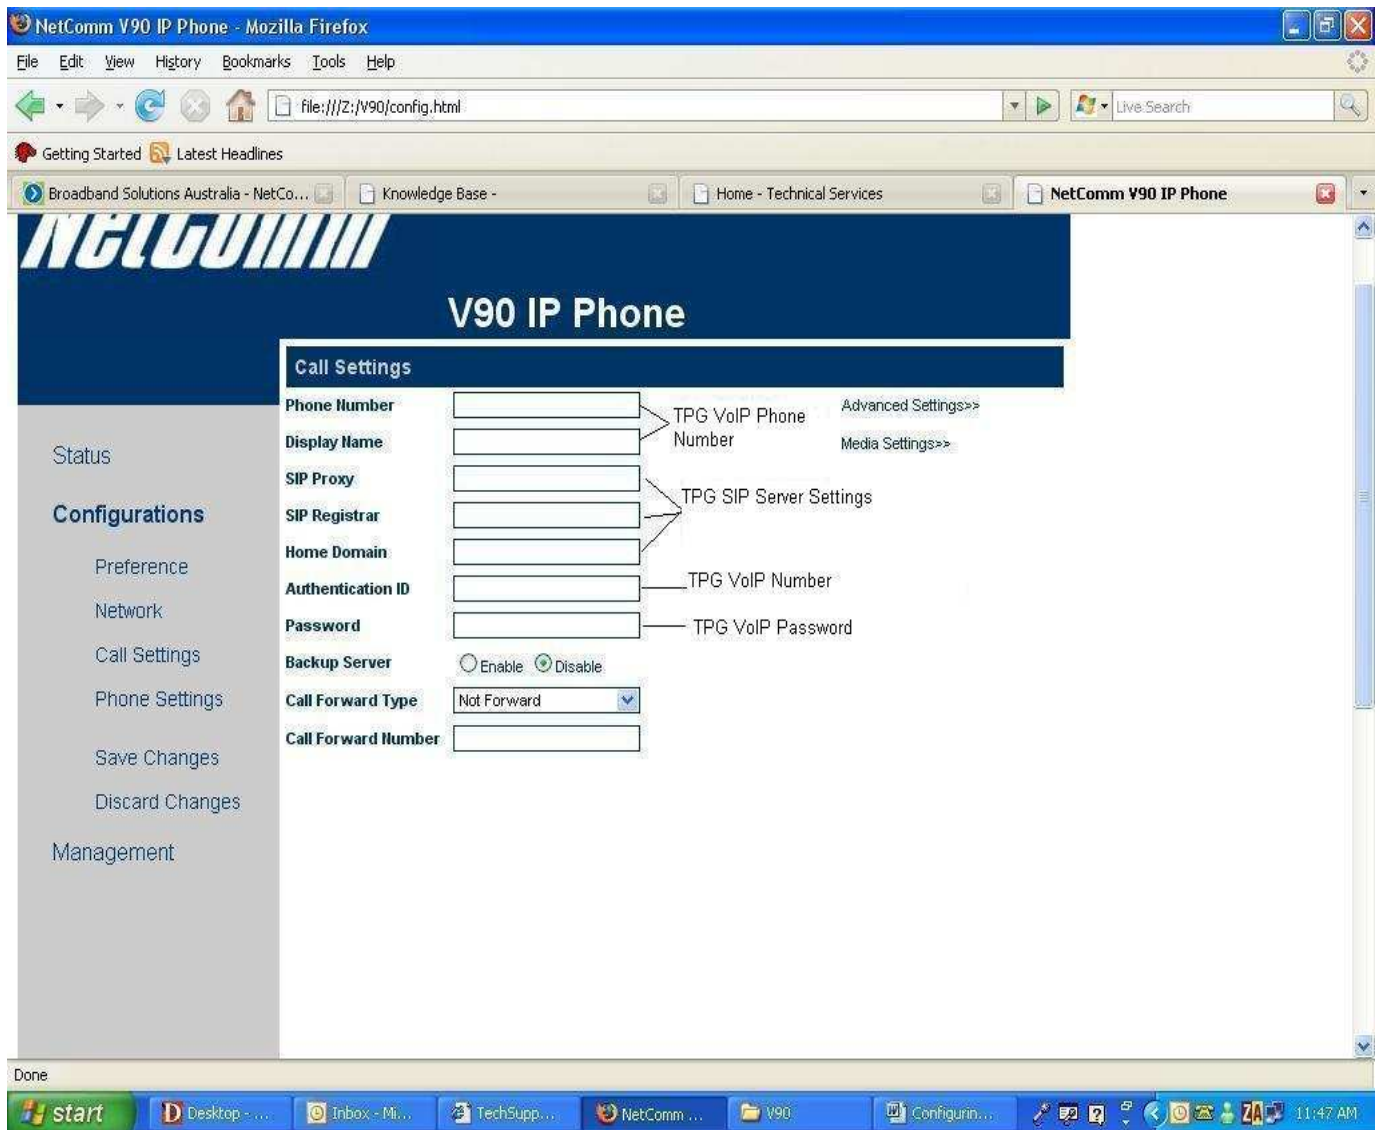

5. Now click "Save changes" on to your left, it will save all the setting you have done.
6. Then click on "Management" and click on "Reboot" to restart the phone.